


erkat | special | drum cutters



ER 250

Transverse and longitudinal drum cutters for excavators from 7 to 15 tons

ER 250 Transverse cutter Standard	Unit	Model ER 250-2	Model ER 250-3	Model ER 250-4
Recommended rotation speed	RPM	95	90	90
Recommended oil flow at 50 bar	l/min	60	70	85
Torque at 350 bar	Nm	3.500	4.350	5.200
Cutting force at 350 bar	N	17.500	21.750	26.000
Weight	kg	450	450	450




Maximum oil flow: 100 l/min
 Max. operating oil pressure: 350 bar
 Recommended minimum operating oil pressure: 210 bar
 Rated power: 45 kW

Maximum oil flow and pressure figures shown in the tabel above cannot be achieved at the same time. Contact Erkat to discuss hydraulic requirements once actual site conditions are known.


Additional options: Cutting Drum Diameter: 450 mm
 Please contact Erkat for further information.

accessories ER 250

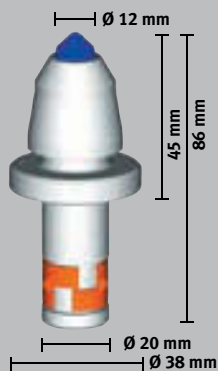

Standard
Round attack pick
ER 12/45/38/20 K
 Part No.
 12 45 38 20

Applications:
 Concrete, soft and medium hard rock

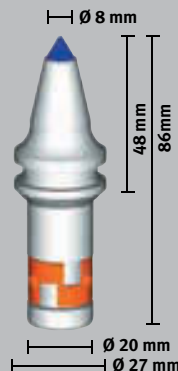

Round attack pick
ER 09/51/25/20 K
 Part No.
 9 51 25 20

Applications:
 Salt, gypsum



Round attack pick
ER 16/46/38/20 S
 Part No.
 16 46 38 20

Applications:
 Concrete, soft and medium hard rock

Retaining clip
ES 250
 Part No.
 99 99 99 91

