


erkat | special | drum cutters



ER 600

Transverse drum cutters
for excavators from 10 to 20 tons


ER 600 Transverse cutter Standard	Unit	Model ER 600-1	Model ER 600-2
Recommended rotation speed	RPM	80	80
Recommended oil flow at 50 bar	l/min	120	150
Torque at 350 bar	Nm	8.673	10.400
Cutting force at 350 bar	N	30.167	36.174
Weight	kg	900	900



Maximum oil flow: 170 l/min
Max. operating oil pressure: 350 bar
Recommended minimum operating oil pressure: 300 bar
Rated power: 65 kW

Maximum oil flow and pressure figures shown in the table above cannot be achieved at the same time.
Contact Erkat to discuss hydraulic requirements once actual site conditions are known.


accessories ER 600 | ER 650

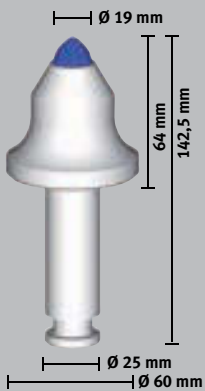

Standard
Round attack pick
ER 19/64/60/25 Q
Part No.
19 64 60 26

Applications:
Asphalt, concrete,
medium hard and
hard rock


QuickSnap
QS 600
Part No.
99 25 00 25

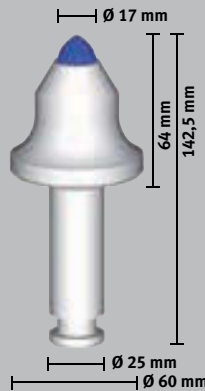

Round attack pick
ER 17/64/60/25 Q
Part No.
17 64 60 26

Applications:
Asphalt, concrete,
medium hard and
hard rock

QuickSnap
QS 600
Part No.
99 25 00 25

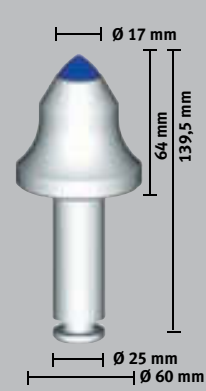

Round attack pick
ER 17/64/60/25 S
Part No.
17 64 60 25

Applications:
Asphalt, concrete,
medium hard and
hard rock

Retaining clip
ES 600
Part No.
99 99 99 94

