



Australian Hammer Supplies Hire
Unit 3/32 Williamson Road
Ingleburn
NSW 2565

KOBELCO SK135SR-7

Major Service



0 19 78 10

Inspection Number	RP059356	Customer No	200000
Serial Number	YY09048729	Customer Name	AUSTRALIAN HAMMER SUPPLIES HIRE
Make	KOBELCO	Customer Email	
Model	SK135SR-7	Works Order	RP059356
Equipment Family	11.6-17T HYDRAULIC EXCAVATOR	Completed On	29/05/2026 3:59:15 PM
Asset ID	AHSH146	Inspector	Jake Raffen
Location	AUSTRILAN HAMMER SUPPLIES HIRE Unit 3/32 WILLIAMSON RD INGLEBURN 2565	PDF Generated On	29/05/2026
		Machine Hours	4067
		Next Meter	4500
Customer			

General Info & Comments

General Info/Comments

2000hr service

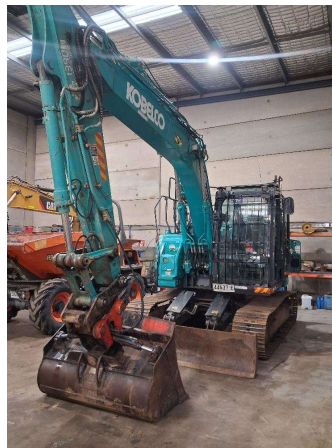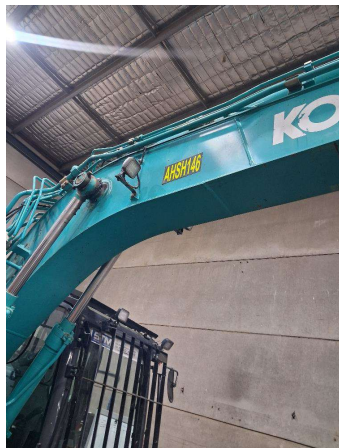

TASK SAFETY INSTRUCTIONS

- | | |
|--|--------|
| 1.1 Wear Correct PPE at all times | NORMAL |
| 1.2 All isolation and safe work procedures must be followed | NORMAL |
| 1.3 Identify task hazards and controls utilising hierarchy or controls model | NORMAL |
| 1.4 Ensure a competent operator and spotter is utilised to move mobile equipment | NORMAL |
| 1.5 Ensure all mobile equipment is fundamentally stable | NORMAL |
| 1.6 Ensure three points of contact is maintained during access and egress | NORMAL |
| 1.7 Ensure acceptable housekeeping standards are maintained at all times | NORMAL |

MACHINE GENERAL RUNNINGCHECKS

● 2.1 Check all work lights, beacon & reverse alarm for operation	PASS
● 2.2 Test all dash warning lights, gauges and audible alarms for correct operation	PASS
● 2.3 Check idle timer for correct shut down operation	N/A
● 2.4 Check operation of all three emergency stop buttons	PASS
● 2.5 Check operation of horn	PASS
● 2.6 Check operation of reverse camera	PASS
● 2.7 Check alternator charge voltage	PASS
● 2.8 Check operation of auto grease system by manually activating timer	N/A
● 2.9 Check fire system control panel for 'Normal'	N/A

PM FIRE SUPPRESSION SYSTEM

● 5.1 Ensure fire suppression bottle and components are securely mounted and in good condition	N/A
● 5.2 Ensure fire suppression is correctly charged	N/A
● 5.3 Inspect last charge date	DATE:2026-05-29 T00:00:00.000000 0
● 5.4 Check all fire extinguishers are securely mounted and in good condition	PASS
● 5.5 Check all fire extinguishers are correctly charged	PASS
● 5.6 Inspect last charge date	DATE:2026-05-29 T00:00:00.000000 0

PM ENGINE

● 6.1 Perform engine valve set	N/A
● 6.2 Inspect air intake system hoses, pipes, clamps for signs of dirt ingress	PASS
● 6.3 Inspect engine for oil or fuel leaks	PASS
● 6.4 Inspect engine components for missing clamps	PASS

● 6.5 Inspect exhaust systemfor signs of leaks, loose bolts or missing clamps	PASS
● 6.6 Inspect turbo for security and signs of leaks	PASS
● 6.7 Inspect condition of exhaust lagging	PASS
● 6.8 Inspect engine mounts for condition and loose hardware	PASS
● 6.9 Inspect alternator mount condition and adjustment	PASS
● 6.10 Inspect wiring condition and security	PASS
● 6.11 Inspect engine belts	PASS

PM ENGINE COOLINGSYSTEM

● 7.1 Check coolant level	PASS
● 7.2 Check condition of radiator cap	PASS
● 7.3 Check condition of radiator core	PASS
● 7.4 Check cooling systemfor signs of leaks	PASS
● 7.5 Check hose and clamp condition	PASS
● 7.6 Inspect fan condition and operation	PASS
● 7.7 Inspect radiator and fan guard condition	PASS

PM SWINGTRANSMISSION

● 8.1 Inspect swing transmission for signs of leaks	PASS
● 8.2 Inspect swing transmission oil level	PASS

PM HYDRAULIC SYSTEM

● 9.1 Check hydraulic oil level	PASS
● 9.2 Inspect hydraulic cylinders for leaks and security	PASS
● 9.3 Inspect hydraulic hoses for leaks, damage, security	PASS
● 9.4 Inspect hydraulic pump condition, leaks, security	PASS

- | | | |
|---|---|------|
| ● | 9.5 Check Pilot Accumulator operation as per OEM Maintenance Procedure - Test Boom Down Functionality with engine off | PASS |
|---|---|------|

PM FINAL DRIVES

- | | | |
|---|---|------|
| ● | 10.1 Inspect LHS final drive mount condition for leaks and security | PASS |
| ● | 10.2 Inspect LHS oil level and mag plug condition | PASS |
| ● | 10.3 Inspect RHS final drive mount condition for leaks and security | PASS |
| ● | 10.4 Inspect RHS oil level and mag plug condition | PASS |

PM UNDERCARRIAGE

- | | | |
|---|---|---------|
| ● | 11.1 Inspect LHS track tension | PASS |
| ● | 11.2 Inspect RHS track tension | PASS |
| ● | 11.3 Inspect tracks for loose/missing bolts | MONITOR |
| ● | 11.4 Inspect load and carrier rollers for signs of leaks | MONITOR |
| ● | 11.5 Inspect idlers for signs of leaks | MONITOR |
| ● | 11.6 Inspect sprocket segments condition | MONITOR |
| ● | 11.7 Inspect track frame for cracks, lose or missing hardware | PASS |

PM FRAME AND BODY

- | | | |
|---|---|---------|
| ● | 12.1 Check panels for damage and security | MONITOR |
| ● | 12.2 Check access steps and walkway condition | PASS |
| ● | 12.3 Inspect boom condition – cracks, missing clamps, damaged pipes, excessive movement, lubrication | PASS |
| ● | 12.4 Inspect stick condition – cracks, missing clamps, damaged pipes, excessive movement, lubrication | PASS |
| ● | 12.5 Inspect quick hitch condition and operation | PASS |
| ● | 12.6 Inspect bucket condition – cracks, wear, damage, mounts | PASS |
| ● | 12.7 Inspect GET condition and hardware | MONITOR |

PM ELECTRICAL SYSTEM

● 13.1 Check battery condition	PASS
● 13.2 Check battery terminal condition	PASS
● 13.3 Check battery security	PASS
● 13.4 Check battery box drain is clear	PASS
● 13.5 Check wiring condition and security	PASS

PM GREASE SYSTEM

● 14.1 Check all points for acceptable lubrication	PASS
● 14.2 Inspect grease system operation	PASS
● 14.3 Check grease line condition	PASS
● 14.4 Refill grease tank	N/A
● 14.5 Lubricate bucket linkage	PASS
● 14.6 Lubricate blade linkage	PASS
● 14.7 Lubricate boom & stick linkage	PASS
● 14.8 Lubricate swing bearing	PASS

PM OPERATOR STATION

● 15.1 Check all doors for correct opening and closing adjustments and operation	PASS
● 15.2 Inspect condition of door seals	PASS
● 15.3 Check window glass and seal condition	PASS
● 15.4 Check mirror condition and adjustments	PASS
● 15.5 Fill window washer reservoir	PASS
● 15.6 Inspect air con vents condition	PASS
● 15.7 Inspect seat belt and mounting hardware	PASS

● 15.8 Inspect seat condition, operation and mounting PASS

● 15.9 Replace cabin A/C filter PASS

OIL SAMPLING

● 16.1 Engine N/A

PM POST SERVICE INSPECTION CHECKS

● 17.1 All inspections have been completed and rectified as required NORMAL

● 17.2 All safety related defects have been repaired or reported NORMAL

● 17.3 All defects have been noted and reported NORMAL

● 17.4 All fluids are at correct level and drain plugs tight NORMAL

● 17.5 All oil samples have visually been inspected and any notable signs of contamination have been reported NORMAL

● 17.6 All replaced filters have been cut and inspected and photos added to CAT Inspect and reported to supervisor N/A

● 17.7 Machine has been recommissioned and ready for operation NORMAL

● 17.8 PM service notification marked off in Vision Link N/A

DEFECTS IDENTIFIED

● 18.1 DEFECTS IDENTIFIED AS PER DEHIRE DEFCECT TAG: undercarriage sevearly worn and excessive movement in track pins. height and slew limit switches not secure and not activating. FOUND ON SERVICE: Cutting edge on B1498 worn and require replacment. body panel paint damage.

OIL USED



● 19.1 Hydraulic oil	72
● 19.2 Engine oil	17
● 19.3 Slew oil	0
● 19.4 Gear oil	6
● 19.5 Coolant	0

● Site photo
● Site photo
● Site photo
● Site photo
● Site photo
● Site photo
● Site photo
● Site photo
● Site photo
● Site photo