



336

Hydraulic Excavator

Technical Specifications

Engine

Engine Model	Cat® C9.3B	
Net Power – ISO 9249	232 kW	311 hp
Net Power – SAE J1349	232 kW	311 hp
Gross Power – ISO 14396/SAE J1995	234 kW	314 hp
Bore	115 mm	5 in
Stroke	149 mm	6 in
Displacement	9.3 L	568 in ³

- Meets U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Recommended for use up to 3300 m (10,830 ft) altitude with engine power derate above 2300 m (7,550 ft).
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- Rating at 1,800 rpm.

Engine rpm

Operation	1,550 rpm
Travel	1,800 rpm

Swing Mechanism

Swing Speed	8.75 rpm
Maximum Swing Torque	144 kN·m 106,228 lbf·ft

Weights

Operating Weight	37 200 kg	81,900 lb
------------------	-----------	-----------

- Long undercarriage, Reach boom, R3.9DB (12'10") stick, GD 2.27 m³ (2.97 yd³) bucket, 850 mm (33") triple grouser shoes, 6.8 mt (14,991 lb) counterweight.

Track

Standard Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	800 mm	31 in
Optional Track Shoes Width	850 mm	33 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.7 km/h	2.9 mph
Maximum Drawbar Pull	295 kN	66,206 lbf

Hydraulic System

Main System – Maximum Flow – Implement	558 L/min (279 × 2 pumps)	147 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,511 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	29 400 kPa	4,264 psi
Boom Cylinder – Bore	150 mm	6 in
Boom Cylinder – Stroke	1440 mm	57 in
Stick Cylinder – Bore	170 mm	7 in
Stick Cylinder – Stroke	1738 mm	68 in
DB Bucket Cylinder – Bore	150 mm	6 in
DB Bucket Cylinder – Stroke	1151 mm	45 in
TB Bucket Cylinder – Bore	160 mm	6 in
TB Bucket Cylinder – Stroke	1356 mm	53 in



336 Hydraulic Excavator Specifications

Service Refill Capacities

Fuel Tank Capacity	600 L	158.5 gal
Cooling System	40 L	10.5 gal
Engine Oil (with filter)	32 L	8.5 gal
Swing Drive (each)	18 L	4.8 gal
Final Drive (each)	8 L	2.1 gal
Hydraulic System (including tank)	373 L	98.5 gal
Hydraulic Tank	153 L	40.4 gal
DEF Tank	80 L	21.1 gal

Standards

Brakes	ISO 10265:2008
Cab/FOGS	ISO 10262:1998
Cab/ROPS	ISO 12117-2:2008

Sound Performance

ISO 6395 (external)	105 dB(A)
ISO 6396 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Operating Weights and Ground Pressures

	600 mm (24") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes		700 mm (28") Triple Grouser Shoes		800 mm (31") Triple Grouser Shoes		850 mm (33") Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with HD Track Rollers and Carrier Rollers										
6.8 mt (14,991 lb) Counterweight + Long Undercarriage Base Machine										
Reach Boom + R3.9 (12'10") Stick + 2.27 m³ (2.97 yd³) GD Bucket	35 900 (79,200)	66.9 (9.7)	36 700 (80,900)	68.4 (9.9)	36 300 (80,000)	57.9 (8.4)	36 900 (81,400)	51.6 (7.5)	37 200 (81,900)	48.8 (7.1)
Reach Boom + R3.2 (10'6") Stick + 2.27 m³ (2.97 yd³) GD Bucket	35 800 (78,900)	66.7 (9.7)	36 500 (80,600)	68.1 (9.9)	36 100 (79,700)	57.7 (8.4)	36 800 (81,100)	51.4 (7.5)	37 000 (81,600)	48.6 (7.1)
Reach Boom + R2.8 (9'2") Stick + 2.27 m³ (2.97 yd³) GD Bucket	35 700 (78,700)	66.5 (9.6)	36 500 (80,400)	67.9 (9.8)	36 100 (79,500)	57.6 (8.3)	36 700 (80,900)	51.3 (7.4)	36 900 (81,400)	48.5 (7.0)
Mass Boom + M2.55 (8'4") Stick + 2.41 m³ (3.15 yd³) SD Bucket	37 300 (82,300)	69.5 (10.1)	38 100 (84,000)	71.0 (10.3)	37 700 (83,100)	60.2 (8.7)	38 300 (84,500)	53.6 (7.8)	38 600 (85,000)	50.7 (7.4)
7.56 mt (16,667 lb) Counterweight + Long Undercarriage Base Machine										
Reach Boom + R3.9 (12'10") Stick + 2.27 m³ (2.97 yd³) GD Bucket	36 800 (81,100)	68.5 (9.9)	37 600 (82,800)	70.0 (10.1)	37 200 (81,900)	59.3 (8.6)	37 800 (83,300)	52.8 (7.7)	38 000 (83,800)	50.0 (7.2)
Reach Boom + R3.2 (10'6") Stick + 2.27 m³ (2.97 yd³) GD Bucket	36 600 (80,800)	68.3 (9.9)	37 400 (82,500)	69.7 (10.1)	37 000 (81,600)	59.1 (8.6)	37 600 (83,000)	52.6 (7.6)	37 900 (83,500)	49.8 (7.2)
Reach Boom + R2.8 (9'2") Stick + 2.27 m³ (2.97 yd³) GD Bucket	36 600 (80,600)	68.1 (9.9)	37 300 (82,300)	69.5 (10.1)	36 900 (81,400)	58.9 (8.5)	37 600 (82,800)	52.5 (7.6)	37 800 (83,300)	49.7 (7.2)
Mass Boom + M2.55 (8'4") Stick + 2.41 m³ (3.15 yd³) SD Bucket	38 200 (84,200)	71.1 (10.3)	39 000 (85,900)	72.6 (10.5)	38 600 (85,000)	61.6 (8.9)	39 200 (86,400)	54.8 (7.9)	39 400 (86,900)	51.8 (7.5)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

336 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base machine with 6.8 mt (14,991 lb) counterweight, standard swing frame, base frame with HD track rollers and carrier rollers for long undercarriage	24 530	54,090
Base machine with 7.56 mt (16,667 lb) counterweight, HD swing frame, base frame with HD track rollers and carrier rollers for long undercarriage	25 390	55,980
Track Shoes:		
600 mm (24") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	4090	9,020
600 mm (24") Width, 15.5 mm (0.61") Thick, Double Grouser Track Shoes	4850	10,700
700 mm (28") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	4450	9,800
800 mm (31") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes	5100	11,230
850 mm (33") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes	5300	11,690
Two Boom Cylinders	670	1,470
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	550	1,210
Counterweights:		
6.8 mt Counterweight	6800	14,991
7.56 mt Counterweight	7560	16,667
Swing Frames:		
Standard Swing Frame	3160	6,960
HD Swing Frame	3260	7,180
Long Undercarriage:		
Base Frame with HD Track Rollers and Carrier Rollers	8400	18,520
Booms (including lines, pins, stick cylinder):		
Reach Boom 6.5 m (21'4")	3220	7,100
Mass Boom 6.18 m (20'3")	3480	7,670
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.8DB (9'2")	1710	3,780
Reach Stick R3.2DB (10'6")	1800	3,960
Reach Stick R3.9DB (12'10")	1950	4,310
Mass Stick M2.55TB (8'4")	2130	4,700
Buckets (without linkage):		
2.27 m³ (2.97 yd³) GD	1590	3,510
2.41 m³ (3.15 yd³) SD	2550	5,630
Quick Coupler:		
Pin Grabber QC	700	1,550

336 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

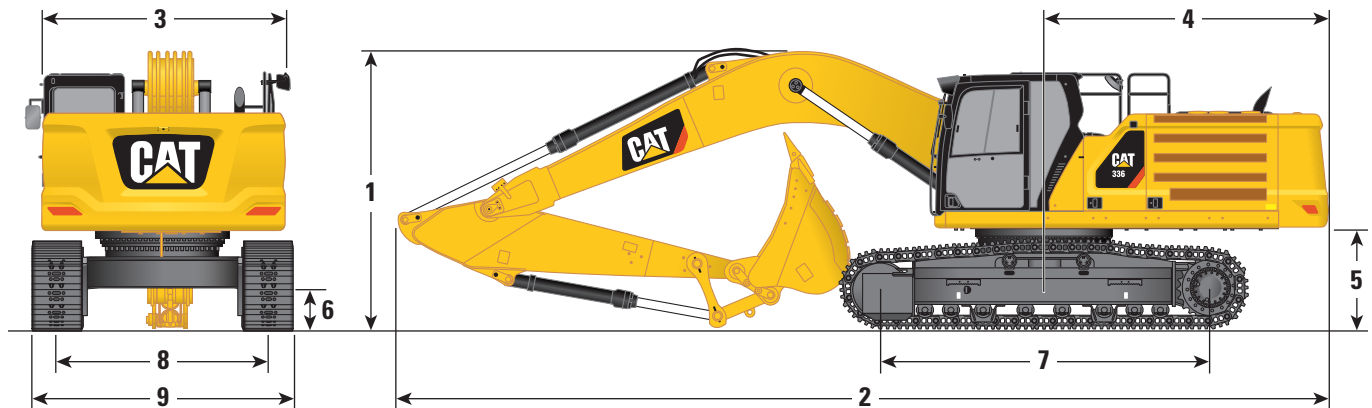

Boom Options

Reach Boom 6.5 m (21'4")

Mass Boom 6.18 m (20'3")

Stick Options

Reach Stick

Mass Stick

R3.9DB (12'10")

R3.2DB (10'6")

R2.8DB (9'2")

M2.55TB (8'4")

1 Machine Height:

Cab Height	mm (ft)	3170 (10.4)	3170 (10.4)	3170 (10.4)	3170 (10.4)
FOGS Height	mm (ft)	3310 (10.9)	3310 (10.9)	3310 (10.9)	3310 (10.9)
Handrails Height	mm (ft)	3160 (10.4)	3160 (10.4)	3160 (10.4)	3160 (10.4)
With Boom/Stick/Bucket Installed	mm (ft)	3670 (12.0)	3470 (11.4)	3650 (12.0)	3610 (11.8)
With Boom/Stick Installed	mm (ft)	3560 (11.7)	3330 (10.9)	3450 (11.3)	3400 (11.2)
With Boom Installed	mm (ft)	2880 (9.4)	2880 (9.4)	2880 (9.4)	2830 (9.3)
With Boom/Stick/Bucket Installed (with auxiliary lines)	mm (ft)	3720 (12.2)	3520 (11.5)	3670 (12.0)	3620 (11.9)
With Boom/Stick Installed (with auxiliary lines)	mm (ft)	3620 (11.9)	3400 (11.2)	3500 (11.5)	3420 (11.2)
With Boom Installed (with auxiliary lines)	mm (ft)	2970 (9.7)	2970 (9.7)	2970 (9.7)	2900 (9.5)

2 Machine Length:

With Boom/Stick/Bucket Installed	mm (ft)	11 200 (36.7)	11 170 (36.6)	11 220 (36.8)	10 890 (35.7)
With Boom/Stick Installed	mm (ft)	11 180 (36.7)	11 140 (36.5)	11 190 (36.7)	10 850 (35.6)
With Boom Installed	mm (ft)	9960 (32.7)	9960 (32.7)	9960 (32.7)	9640 (31.6)
With Boom/Stick/Bucket Installed (with auxiliary lines)	mm (ft)	11 200 (36.7)	11 170 (36.6)	11 220 (36.8)	10 890 (35.7)
With Boom/Stick Installed (with auxiliary lines)	mm (ft)	11 180 (36.7)	11 140 (36.5)	11 190 (36.7)	10 850 (35.6)
With Boom Installed (with auxiliary lines)	mm (ft)	10 010 (32.8)	10 010 (32.8)	10 010 (32.8)	9640 (31.6)

3 Upperframe Width without Walkways

	mm (ft)	3030 (9.9)	3030 (9.9)	3030 (9.9)	3030 (9.9)
--	---------	------------	------------	------------	------------

4 Tail Swing Radius	mm (ft)	3530 (11.6)	3530 (11.6)	3530 (11.6)	3530 (11.6)
---------------------	---------	-------------	-------------	-------------	-------------

5 Counterweight Clearance	mm (ft)	1250 (4.1)	1250 (4.1)	1250 (4.1)	1250 (4.1)
---------------------------	---------	------------	------------	------------	------------

6 Ground Clearance	mm (ft)	510 (1.7)	510 (1.7)	510 (1.7)	510 (1.7)
--------------------	---------	-----------	-----------	-----------	-----------

7 Track Length – Length to Center of Rollers	mm (ft)	4040 (13.3)	4040 (13.3)	4040 (13.3)	4040 (13.3)
--	---------	-------------	-------------	-------------	-------------

8 Track Gauge:					
----------------	--	--	--	--	--

Extended (long undercarriage)	mm (ft)	2590 (8.5)	2590 (8.5)	2590 (8.5)	2590 (8.5)
-------------------------------	---------	------------	------------	------------	------------

9 Track Width/Undercarriage Width (with steps/without steps):					
---	--	--	--	--	--

600 mm (24") Shoes	mm (ft)	3190 (10.5)	3190 (10.5)	3190 (10.5)	3190 (10.5)
--------------------	---------	-------------	-------------	-------------	-------------

700 mm (28") Shoes	mm (ft)	3290 (10.8)	3290 (10.8)	3290 (10.8)	3290 (10.8)
--------------------	---------	-------------	-------------	-------------	-------------

800 mm (31") Shoes	mm (ft)	3390 (11.1)	3390 (11.1)	3390 (11.1)	3390 (11.1)
--------------------	---------	-------------	-------------	-------------	-------------

850 mm (33") Shoes	mm (ft)	3440 (11.3)	3440 (11.3)	3440 (11.3)	3440 (11.3)
--------------------	---------	-------------	-------------	-------------	-------------

Bucket Type		GDC	GDC	GDC	SDV
-------------	--	-----	-----	-----	-----



Bucket Capacity	m ³ (yd ³)	2.27 (2.97)	2.27 (2.97)	2.27 (2.97)	2.41 (3.15)
-----------------	-----------------------------------	-------------	-------------	-------------	-------------

Bucket Tip Radius	mm (ft)	1760 (5.8)	1760 (5.8)	1760 (5.8)	1910 (6.3)
-------------------	---------	------------	------------	------------	------------

336 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

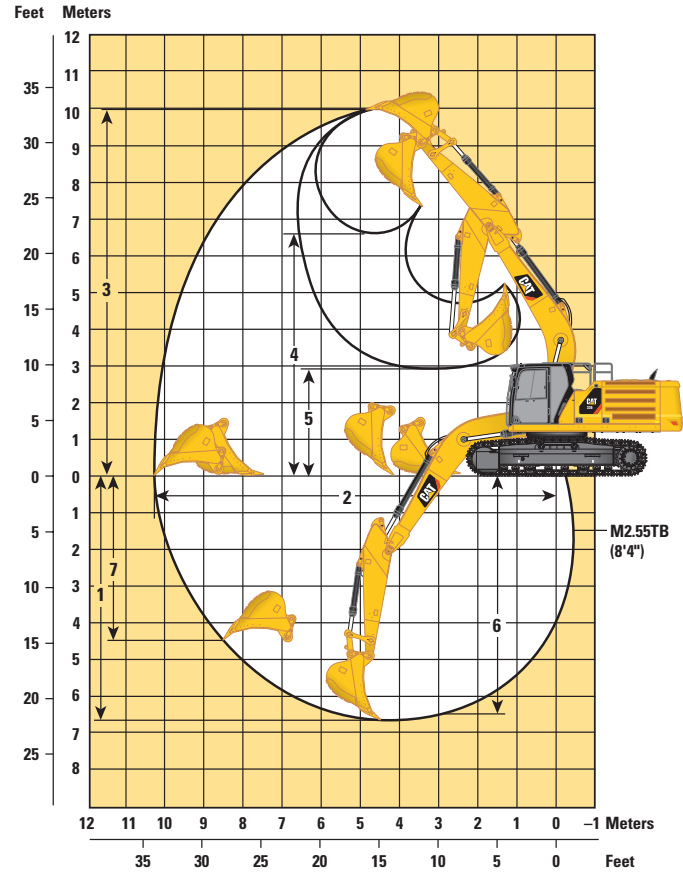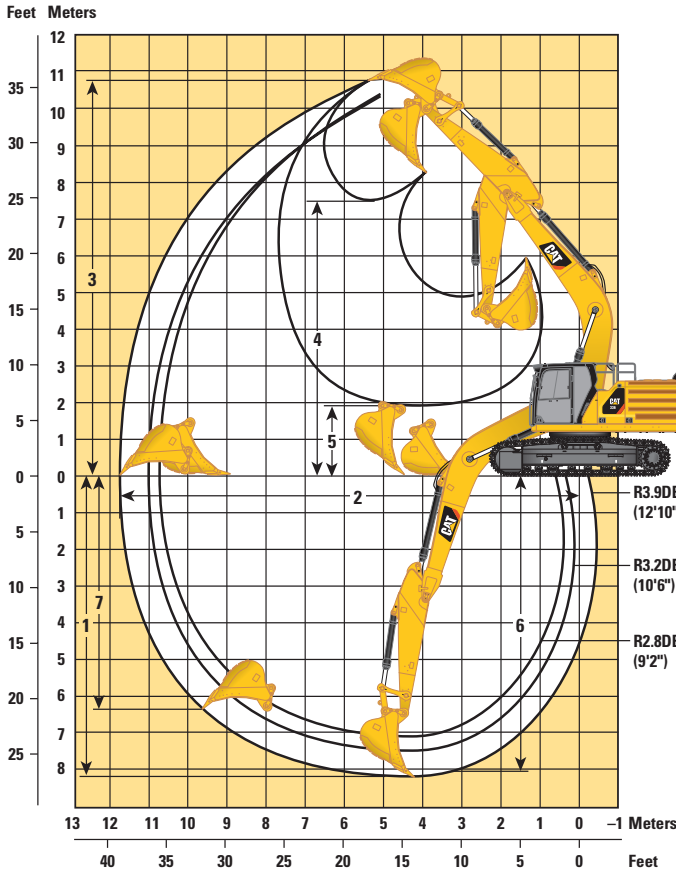

Boom Options

Reach Boom 6.5 m (21'4")

Mass Boom 6.18 m (20'3")

Stick Options

Reach Stick

Mass Stick M2.55TB (8'4")

		R3.9DB (12'10")	R3.2DB (10'6")	R2.8DB (9'2")	M2.55TB (8'4")
1 Maximum Digging Depth	mm (ft)	8200 (26.9)	7500 (24.6)	7100 (23.3)	6670 (21.9)
2 Maximum Reach at Ground Line	mm (ft)	11 730 (38.5)	11 030 (36.2)	10 730 (35.2)	10 280 (33.7)
3 Maximum Cutting Height	mm (ft)	10 740 (35.2)	10 320 (33.9)	10 380 (34.1)	9970 (32.7)
4 Maximum Loading Height	mm (ft)	7490 (24.6)	7100 (23.3)	7100 (23.3)	6600 (21.7)
5 Minimum Loading Height	mm (ft)	1900 (6.2)	2600 (8.5)	3000 (9.8)	2910 (9.5)
6 Maximum Depth Cut for 2240 mm (8 ft) Level Bottom	mm (ft)	8060 (26.4)	7340 (24.1)	6930 (22.7)	6490 (21.3)
7 Maximum Vertical Wall Digging Depth	mm (ft)	6360 (20.9)	5560 (18.2)	5520 (18.1)	4480 (14.7)
Bucket Digging Force (SAE)	kN (lbf)	186 (41,900)	186 (41,900)	186 (41,900)	229 (51,480)
Bucket Digging Force (ISO)	kN (lbf)	210 (47,160)	210 (47,160)	210 (47,160)	265 (59,570)
Stick Digging Force (SAE)	kN (lbf)	141 (31,630)	161 (36,220)	179 (40,150)	183 (41,230)
Stick Digging Force (ISO)	kN (lbf)	144 (32,440)	166 (37,300)	185 (41,500)	191 (42,890)
Bucket Type		GDC	GDC	GDC	SDV
Bucket Capacity	m ³ (yd ³)	2.27 (2.97)	2.27 (2.97)	2.27 (2.97)	2.41 (3.15)
Bucket Tip Radius	mm (ft)	1760 (5.8)	1760 (5.8)	1760 (5.8)	1910 (6.3)

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off


3.9 m (12'10") 6.5 m (21'4")

R3.9DB

600 mm (24") Triple Grouser, Double Grouser Shoes

2590 mm (8.5 ft)

4040 mm (13.3 ft)

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 *13,150	5650 12,050	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7400 15,950	*7400 *16,200	5550 11,900	*5150 *11,250	4750 10,500	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	9900 21,300	*8850 *19,200	7100 15,300	*7850 *17,150	5400 11,550	*5300 *11,600	4450 9,850	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	14 050 30,250	*12 100 *26,150	9350 20,100	*9750 *21,100	6800 14,650	8100 17,450	5200 11,200	*5600 *12,300	4350 9,600	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	13 400 28,900	*13 200 *28,550	8900 19,200	*10 400 *22,400	6550 14,100	7950 17,150	5100 10,900	*6100 *13,450	4400 9,700	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	13 200 28,350	*13 600 *29,500	8700 18,750	10 250 22,050	6400 13,800	7900 17,000	5000 10,750	*6950 *15,350	4650 10,250	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	13 200 28,400	*13 300 *28,700	8650 18,650	10 200 22,000	6400 13,750			8200 18,200	5200 11,500	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	13 400 28,850	*11 950 *25,650	8800 18,950	*8950 *18,850	6500 14,100			*8550 *18,850	6300 14,100	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 16,700			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	7650 16,450	*7500 *14,450	5650 12,050	*5600 *12,350	5300 11,700	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7400 15,950	*8250 *18,000	5550 11,900	*5650 *12,400	4750 10,500	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	15 150 32,650	*11 650 *25,200	9900 21,300	*9800 *21,250	7100 15,300	8300 17,850	5400 11,550	*5800 *12,750	4450 9,850	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	14 050 30,250	*13 400 *28,950	9350 20,100	10 700 23,000	6800 14,650	8100 17,450	5200 11,200	*6150 *13,500	4350 9,600	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	13 400 28,900	14 600 31,400	8900 19,200	10 400 22,400	6550 14,100	7950 17,150	5100 10,900	*6700 *14,750	4400 9,700	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	13 200 28,350	14 350 30,850	8700 18,750	10 250 22,050	6400 13,800	7900 17,000	5000 10,750	7350 16,200	4650 10,250	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	13 200 28,400	14 300 30,750	8650 18,650	10 200 22,000	6400 13,750			8200 18,200	5200 11,500	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	13 400 28,850	*13 300 *28,500	8800 18,950	*10 000 *21,000	6500 14,100			*9550 *21,000	6300 14,100	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 9150						*9300 *20,400	9050 *20,400	6060 240



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications



Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off

3.9 m (12'10") 6.5 m (21'4")

R3.9DB



700 mm (28") Triple Grouser Shoes



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 12,200	5700	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7500 16,100	*7400 *16,200	5600 12,000	*5150 *11,250	4800 10,600	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	9950 21,450	*8850 *19,200	7150 15,450	*7850 *17,150	5450 11,650	*5300 *11,600	4500 9,950	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	14 150 30,500	*12 100 *26,150	9400 20,250	*9750 *21,100	6850 14,750	8200 17,650	5250 11,300	*5600 *12,300	4400 9,650	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	13 550 29,150	*13 200 *28,550	9000 19,400	*10 400 *22,550	6600 14,250	8050 17,300	5100 11,000	*6100 *13,450	4450 9,800	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	13 300 28,600	*13 600 *29,500	8800 18,900	10 350 22,250	6450 13,950	7950 17,150	5050 10,850	*6950 *15,350	4700 10,400	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	13 300 28,650	*13 300 *28,700	8750 18,800	10 300 22,200	6450 13,850			8300 18,350	5250 11,650	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	13 550 29,100	*11 950 *25,650	8850 19,100	*8950 *18,850	6550 14,200			*8550 *18,850	6400 14,200	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 16,800			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	7750 16,600	*7500 *14,450	5700 12,200	*5600 *12,350	5350 11,800	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7500 16,100	*8250 *18,000	5600 12,000	*5650 *12,400	4800 10,600	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	15 250 32,900	*11 650 *25,200	9950 21,450	*9800 *21,250	7150 15,450	8400 18,000	5450 11,650	*5800 *12,750	4500 9,950	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	14 150 30,500	*13 400 *28,950	9400 20,250	10 800 23,200	6850 14,750	8200 17,650	5250 11,300	*6150 *13,500	4400 9,650	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	13 550 29,150	*14 600 *31,650	9000 19,400	10 500 22,600	6600 14,250	8050 17,300	5100 11,000	*6700 *14,750	4450 9,800	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	13 300 28,600	14 500 31,150	8800 18,900	10 350 22,250	6450 13,950	7950 17,150	5050 10,850	7400 16,350	4700 10,400	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	13 300 28,650	14 450 31,000	8750 18,800	10 300 22,200	6450 13,850			8300 18,350	5250 11,650	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	13 550 29,100	*13 300 *28,500	8850 19,100	*10 000 *21,000	6550 14,200			*9550 *21,000	6400 14,200	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 20,250	9250					*9300 *20,400	9150 *20,400	6060 240



ISO 10567





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 12,350	5800	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7600 16,350	*7400 *16,200	5700 12,200	*5150 *11,250	4900 10,750	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	10 100 21,800	*8850 *19,200	7300 15,650	*7850 *17,150	5500 11,850	*5300 *11,600	4600 10,100	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	14 400 30,950	*12 100 *26,150	9550 20,600	*9750 *21,100	6950 15,000	8350 17,950	5350 11,500	*5600 *12,300	4500 9,850	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	13 750 29,600	*13 200 *28,550	9150 19,700	*10 400 *22,550	6750 14,500	8200 17,600	5200 11,200	*6100 *13,450	4550 10,000	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	13 550 29,100	*13 600 *29,500	8950 19,250	10 550 22,650	6600 14,150	8100 17,450	5150 11,050	*6950 *15,350	4800 10,550	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	13 550 29,100	*13 300 *28,700	8900 19,150	*10 400 *22,400	6550 14,100			*8400 *18,500	5350 11,850	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	13 750 29,550	*11 950 *25,650	9000 19,400	*8950 *18,850	6700 14,450			*8550 *18,850	6500 14,450	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	7850 16,850	*7500 *14,450	5800 12,350	*5600 *12,350	5400 12,000	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7600 16,350	*8250 *18,000	5700 12,200	*5650 *12,400	4900 10,750	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 100 21,800	*9800 *21,250	7300 15,650	8550 18,300	5500 11,850	*5800 *12,750	4600 10,100	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	14 400 30,950	*13 400 *28,950	9550 20,600	*10 800 *23,400	6950 15,000	8350 17,950	5350 11,500	*6150 *13,500	4500 9,850	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	13 750 29,600	*14 600 *31,650	9150 19,700	10 700 23,000	6750 14,500	8200 17,600	5200 11,200	*6700 *14,750	4550 10,000	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	13 550 29,100	14 750 31,650	8950 19,250	10 550 22,650	6600 14,150	8100 17,450	5150 11,050	7550 16,650	4800 10,550	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	13 550 29,100	14 700 31,550	8900 19,150	10 500 22,600	6550 14,100			8450 18,700	5350 11,850	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	13 750 29,550	*13 300 *28,500	9000 19,400	*10 000 *21,000	6700 14,450			*9550 *21,000	6500 14,450	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 9400						*9300 *20,400	9300 *20,400	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 12,450	5800	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7650 16,400	*7400 *16,200	5700 12,250	*5150 *11,250	4900 10,850	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	10 150 21,900	*8850 *19,200	7300 15,750	*7850 *17,150	5550 11,900	*5300 *11,600	4600 10,150	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	14 450 31,100	*12 100 *26,150	9600 20,700	*9750 *21,100	7000 15,100	*8350 18,050	5400 11,550	*5600 *12,300	4500 9,900	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	13 850 29,750	*13 200 *28,550	9200 19,800	*10 400 *22,550	6750 14,550	8250 17,700	5250 11,250	*6100 *13,450	4550 10,050	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	13 600 29,250	*13 600 *29,500	9000 19,350	10 600 22,750	6600 14,250	8150 17,550	5150 11,150	*6950 *15,350	4800 10,600	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	13 600 29,250	*13 300 *28,700	8950 19,250	*10 400 *22,400	6600 14,200			*8400 *18,500	5400 11,900	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	13 800 29,750	*11 950 *25,650	9050 19,500	*8950 *18,850	6700 14,550			*8550 *18,850	6500 14,550	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	7900 16,900	*7500 *14,450	5800 12,450	*5600 *12,350	5450 12,050	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7650 16,400	*8250 *18,000	5700 12,250	*5650 *12,400	4900 10,850	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 150 21,900	*9800 *21,250	7300 15,750	8550 18,400	5550 11,900	*5800 *12,750	4600 10,150	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	14 450 31,100	*13 400 *28,950	9600 20,700	*10 800 *23,400	7000 15,100	8400 18,050	5400 11,550	*6150 *13,500	4500 9,900	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	13 850 29,750	*14 600 *31,650	9200 19,800	10 750 23,100	6750 14,550	8250 17,700	5250 11,250	*6700 *14,750	4550 10,050	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	13 600 29,250	14 800 31,850	9000 19,350	10 600 22,750	6600 14,250	8150 17,550	5150 11,150	7600 16,700	4800 10,600	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	13 600 29,250	*14 750 31,700	8950 19,250	10 550 22,700	6600 14,200			8500 18,800	5400 11,900	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	13 800 29,750	*13 300 *28,500	9050 19,500	*10 000 *21,000	6700 14,550			*9550 *21,000	6500 14,550	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 20,900	9450					*9300 *20,400	9300 *20,400	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	7600			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	7550 16,200			*6550 *14,450	6050 13,400	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7350 15,750	*7750	5500	*6600 *14,500	5350 11,850	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	14 700 31,700	*11 450 *24,750	9700 20,950	*9500 *20,550	7050 15,200	8300 17,800	5350 11,500	*6850 *15,100	5000 11,050	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	13 800 29,700	*12 850 *27,750	9250 19,900	*10 250 *22,200	6800 14,600	8150 17,500	5250 11,250	*7350 *16,150	4900 10,750	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	13 400 28,850	*13 600 *29,500	8950 19,250	10 450 22,450	6600 14,200	8050 17,300	5150 11,050	7750 17,100	4950 10,950	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	13 350 28,650	*13 700 *29,700	8800 18,950	10 350 22,250	6500 14,000			8350 18,350	5300 11,700	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	13 450 28,900	*12 950 *28,000	8800 19,000	*10 050 *21,500	6550 14,100			*9150 *20,200	6050 13,450	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	13 750 29,550	*10 900 *23,250	9050 19,500					*9200 *20,250	7750 17,300	6750 270

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	7600			*7400 *16,300	7250 16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	7550 16,200			*7200 *15,800	6050 13,400	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	10 300 22,150	*9600 *20,900	7350 15,750	8400	5500	*7250 *15,900	5350 11,850	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	14 700 31,700	*12 650 *27,400	9700 20,950	*10 500 *22,800	7050 15,200	8300 17,800	5350 11,500	*7500 *16,500	5000 11,050	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	13 800 29,700	*14 200 *30,700	9250 19,900	10 650 22,900	6800 14,600	8150 17,500	5250 11,250	7600 16,700	4900 10,750	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	13 400 28,850	14 600 31,350	8950 19,250	10 450 22,450	6600 14,200	8050 17,300	5150 11,050	7750 17,100	4950 10,950	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	13 350 28,650	14 450 31,000	8800 18,950	10 350 22,250	6500 14,000			8350 18,350	5300 11,700	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	13 450 28,900	*14 350 *31,050	8800 19,000	10 400 22,350	6550 14,100			9550 21,200	6050 13,450	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	13 750 29,550	*12 150 *25,800	9050 19,500					*10 250 *22,550	7750 17,300	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	7700			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	7600 16,350			*6550 *14,450	6100 13,500	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7400 15,900	*7750	5550	*6600 *14,500	5400 11,950	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	14 800 31,950	*11 450 *24,750	9800 21,150	*9500 *20,550	7100 15,300	8350 17,950	5400 11,650	*6850 *15,100	5050 11,150	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	13 900 30,000	*12 850 *27,750	9300 20,100	*10 250 *22,200	6850 14,750	8200 17,650	5300 11,350	*7350 *16,150	4950 10,850	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	13 550 29,100	*13 600 *29,500	9000 19,400	10 550 22,650	6650 14,300	8100 17,450	5200 11,150	7850 17,250	5000 11,050	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	13 450 28,900	*13 700 *29,700	8900 19,100	10 450 22,450	6550 14,150			8400 18,550	5350 11,800	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	13 550 29,150	*12 950 *28,000	8900 19,200	*10 050 *21,500	6600 14,250			*9150 *20,200	6150 13,550	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	13 850 29,800	*10 900 *23,250	9100 19,700					*9200 *20,250	7800 17,500	6750 270

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	7700			*7400 *16,300	7350 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	7600 16,350			*7200 *15,800	6100 13,500	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	10 350 22,300	*9600 *20,900	7400 15,900	*8500	5550	*7250 *15,900	5400 11,950	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	14 800 31,950	*12 650 *27,400	9800 21,150	*10 500 *22,800	7100 15,300	8350 17,950	5400 11,650	*7500 *16,500	5050 11,150	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	13 900 30,000	*14 200 *30,700	9300 20,100	10 750 23,150	6850 14,750	8200 17,650	5300 11,350	7650 16,850	4950 10,850	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	13 550 29,100	14 750 31,650	9000 19,400	10 550 22,650	6650 14,300	8100 17,450	5200 11,150	7850 17,250	5000 11,050	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	13 450 28,900	14 550 31,300	8900 19,100	10 450 22,450	6550 14,150			8400 18,550	5350 11,800	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	13 550 29,150	*14 350 *31,050	8900 19,200	10 500 22,550	6600 14,250			9650 21,400	6150 13,550	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	13 850 29,800	*12 150 *25,800	9100 19,700					*10 250 *22,550	7800 17,500	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	7800			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	7700 16,600			*6550 *14,450	6150 13,700	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7500 16,150	*7750	5650	*6600 *14,500	5500 12,150	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	15 050 32,450	*11 450 *24,750	9950 21,450	*9500 *20,550	7200 15,550	*8400 18,250	5500 11,800	*6850 *15,100	5150 11,300	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	14 150 30,450	*12 850 *27,750	9450 20,400	*10 250 *22,200	6950 15,000	8350 17,950	5350 11,550	*7350 *16,150	5000 11,050	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	13 750 29,550	*13 600 *29,500	9150 19,700	10 700 23,050	6750 14,550	8250 17,750	5300 11,350	7950 17,550	5100 11,250	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	13 650 29,400	*13 700 *29,700	9000 19,450	10 600 22,850	6650 14,350			8550 18,850	5450 12,050	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	13 750 29,600	*12 950 *28,000	9050 19,500	*10 050 *21,500	6700 14,500			*9150 *20,200	6250 13,800	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 050 30,300	*10 900 *23,250	9250 20,000					*9200 *20,250	7950 17,750	6750 270

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	7800			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	7700 16,600			*7200 *15,800	6150 13,700	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	10 500 22,650	*9600 *20,900	7500 16,150	*8500	5650	*7250 *15,900	5500 12,150	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 050 32,450	*12 650 *27,400	9950 21,450	*10 500 *22,800	7200 15,550	8500 18,250	5500 11,800	*7500 *16,500	5150 11,300	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	14 150 30,450	*14 200 *30,700	9450 20,400	10 950 23,500	6950 15,000	8350 17,950	5350 11,550	7800 17,150	5000 11,050	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	13 750 29,550	15 000 32,200	9150 19,700	10 700 23,050	6750 14,550	8250 17,750	5300 11,350	7950 17,550	5100 11,250	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	13 650 29,400	14 800 31,850	9000 19,450	10 600 22,850	6650 14,350			8550 18,850	5450 12,050	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	13 750 29,600	*14 350 *31,050	9050 19,500	10 650 22,950	6700 14,500			9850 21,750	6250 13,800	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	14 050 30,300	*12 150 *25,800	9250 20,000					*10 250 *22,550	7950 17,750	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	7800			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	7750 16,650			*6550 *14,450	6200 13,800	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7550 16,200	*7750	5650	*6600 *14,500	5500 12,200	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	15 100 32,600	*11 450 *24,750	10 000 21,550	*9500 *20,550	7250 15,650	*8400 *18,300	5550 11,900	*6850 *15,100	5150 11,400	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	14 200 30,600	*12 850 *27,750	9500 20,500	*10 250 *22,200	7000 15,050	8400 18,050	5400 11,600	*7350 *16,150	5050 11,100	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	13 800 29,700	*13 600 *29,500	9200 19,850	*10 750 *23,200	6800 14,650	8300 17,850	5300 11,400	8000 17,650	5150 11,300	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	13 750 29,550	*13 700 *29,700	9050 19,550	10 650 22,950	6700 14,450			8600 19,000	5500 12,100	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	13 850 29,750	*12 950 *28,000	9100 19,600	*10 050 *21,500	6750 14,550			*9150 *20,200	6250 13,850	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 150 30,450	*10 900 *23,250	9300 20,100					*9200 *20,250	8000 17,850	6750 270

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	7800			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	7750 16,650			*7200 *15,800	6200 13,800	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	10 550 22,750	*9600 *20,900	7550 16,200	*8500	5650	*7250 *15,900	5500 12,200	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 100 32,600	*12 650 *27,400	10 000 21,550	*10 500 *22,800	7250 15,650	8550 18,350	5550 11,900	*7500 *16,500	5150 11,400	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	14 200 30,600	*14 200 *30,700	9500 20,500	11 000 23,650	7000 15,050	8400 18,050	5400 11,600	7850 17,250	5050 11,100	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	13 800 29,700	15 050 32,350	9200 19,850	10 750 23,200	6800 14,650	8300 17,850	5300 11,400	8000 17,650	5150 11,300	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	13 750 29,550	14 900 32,000	9050 19,550	10 650 22,950	6700 14,450			8600 19,000	5500 12,100	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	13 850 29,750	*14 350 *31,050	9100 19,600	10 700 23,100	6750 14,550			9900 21,900	6250 13,850	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	14 150 30,450	*12 150 *25,800	9300 20,100					*10 250 *22,550	8000 17,850	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	7800 17,500	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	7500 16,050			*8200 *18,100	6400 14,150	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	10 150 21,950	*9100 *19,750	7300 15,650			*8200 *18,100	5650 12,450	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	14 450 31,200	*11 950 *25,800	9650 20,800	*9800 *21,300	7000 15,100	8250	5350	8100 17,900	5250 11,600	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	13 700 29,500	*13 200 *28,500	9200 19,850	*10 500 *22,750	6800 14,600	8150	5250	7950 17,550	5150 11,300	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	13 450 28,900	*13 800 *29,850	8950 19,250	10 450 22,500	6600 14,250			8200 18,000	5250 11,550	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	13 400 28,850	*13 650 *29,600	8850 19,050	10 400 22,350	6550 14,150			8850 19,500	5650 12,450	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	13 600 29,200	*12 650 *27,300	8900 19,250	*9600	6650			*9350 *20,600	6550 14,500	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	13 400 *28,700	*10 000 *20,950	9200 19,900					*9100 *20,000	8600 19,300	6330 250

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	7800 17,500	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	7500 16,050			*9000 *19,800	6400 14,150	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 150 21,950	*10 050 *21,850	7300 15,650			8650 19,100	5650 12,450	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	14 450 31,200	*13 200 *28,500	9650 20,800	*10 850 23,500	7000 15,100	8250	5350	8100 17,900	5250 11,600	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	13 700 29,500	*14 600 *31,500	9200 19,850	10 650 22,900	6800 14,600	8150	5250	7950 17,550	5150 11,300	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	13 450 28,900	14 600 31,350	8950 19,250	10 450 22,500	6600 14,250			8200 18,000	5250 11,550	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	13 400 28,850	14 500 31,150	8850 19,050	10 400 22,350	6550 14,150			8850 19,500	5650 12,450	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	13 600 29,200	*14 000 *30,250	8900 19,250	10 500	6650			10 300 22,850	6550 14,500	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	13 950 30,000	*11 100 *23,300	9200 19,900					*10 150 *22,300	8600 19,300	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	7850 17,650	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	7550 16,200			*8200 *18,100	6450 14,300	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 22,100	*9100 *19,750	7350 15,800			*8200 *18,100	5700 12,550	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	14 550 31,450	*11 950 *25,800	9700 20,950	*9800 *21,300	7100 15,250	8350	5400	8200 18,050	5300 11,700	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	13 800 29,750	*13 200 *28,500	9300 20,000	*10 500 *22,750	6850 14,750	8200	5300	8050 17,700	5200 11,400	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	13 550 29,150	*13 800 *29,850	9000 19,450	10 550 22,700	6700 14,400			8250 18,200	5300 11,650	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	13 550 29,100	*13 650 *29,600	8950 19,250	10 500 22,600	6600 14,250			8950 19,700	5700 12,600	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	13 700 29,450	*12 650 *27,300	9000 19,400	*9600	6700			*9350 *20,600	6600 14,650	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	9300 20,100					*9100 *20,000	8700 19,500	6330 250

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	7850 17,650	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	7550 16,200			*9000 *19,800	6450 14,300	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 250 22,100	*10 050 *21,850	7350 15,800			8700 19,300	5700 12,550	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	14 550 31,450	*13 200 *28,500	9700 20,950	*10 850 *23,600	7100 15,250	8350	5400	8200 18,050	5300 11,700	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	13 800 29,750	*14 600 *31,500	9300 20,000	10 750 23,100	6850 14,750	8200	5300	8050 17,700	5200 11,400	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	13 550 29,150	14 750 31,650	9000 19,450	10 550 22,700	6700 14,400			8250 18,200	5300 11,650	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	13 550 29,100	14 650 31,450	8950 19,250	10 500 22,600	6600 14,250			8950 19,700	5700 12,600	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	13 700 29,450	*14 000 *30,250	9000 19,400	10 600	6700			*10 400 *22,900	6600 14,650	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	14 050 30,250	*11 100 *23,300	9300 20,100					*10 150 *22,300	8700 19,500	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	7950 17,900	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	7650 16,450			*8200 *18,100	6550 14,500	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	10 400 22,400	*9100 *19,750	7450 16,050			*8200 *18,100	5800 12,750	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	14 800 31,950	*11 950 *25,800	9850 21,300	*9800 *21,300	7200 15,500	8500	5500	8350 18,350	5400 11,900	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 000 30,200	*13 200 *28,500	9450 20,350	*10 500 *22,750	6950 15,000	8350	5400	8200 18,000	5250 11,600	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	13 750 29,600	*13 800 *29,850	9150 19,750	10 750 23,100	6800 14,600			8400 18,500	5400 11,850	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	13 750 29,600	*13 650 *29,600	9100 19,550	10 650 22,950	6750 14,500			9100 20,050	5800 12,800	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	13 900 29,950	*12 650 *27,300	9150 19,700	*9600	6800			*9350 *20,600	6700 14,900	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	9450 20,400					*9100 *20,000	8850 19,800	6330 250

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	7950 17,900	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	7650 16,450			*9000 *19,800	6550 14,500	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 400 22,400	*10 050 *21,850	7450 16,050			8850 19,600	5800 12,750	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	14 800 31,950	*13 200 *28,500	9850 21,300	*10 850 *23,600	7200 15,500	8500	5500	8350 18,350	5400 11,900	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 000 30,200	*14 600 *31,500	9450 20,350	10 900 23,500	6950 15,000	8350	5400	8200 18,000	5250 11,600	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	13 750 29,600	15 000 32,200	9150 19,750	10 750 23,100	6800 14,600			8400 18,500	5400 11,850	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	13 750 29,600	14 900 31,950	9100 19,550	10 650 22,950	6750 14,500			9100 20,050	5800 12,800	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	13 900 29,950	*14 000 *30,250	9150 19,700	*10 650	6800			*10 400 *22,900	6700 14,900	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	14 250 30,700	*11 100 *23,300	9450 20,400					*10 150 *22,300	8850 19,800	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	8000 18,000	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	7700 16,500			*8200 *18,100	6550 14,600	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 22,500	*9100 *19,750	7500 16,100			*8200 *18,100	5800 12,850	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	14 850 32,100	*11 950 *25,800	9900 21,400	*9800 *21,300	7250 15,550	8550	5500	8350 18,450	5400 11,950	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 100 30,350	*13 200 *28,500	9500 20,450	*10 500 *22,750	7000 15,050	8400	5400	8200 18,100	5300 11,650	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	13 850 29,750	*13 800 *29,850	9200 19,850	10 800 23,250	6800 14,700			8450 18,600	5400 11,900	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	13 850 29,750	*13 650 *29,600	9150 19,650	10 750 23,100	6750 14,600			9150 20,150	5850 12,850	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	14 000 30,100	*12 650 *27,300	9200 19,800	*9600	6850			*9350 *20,600	6750 14,950	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	9500 20,500					*9100 *20,000	8850 19,900	6330 250

Reach Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	8000 18,000	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	7700 16,500			*9000 *19,800	6550 14,600	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 450 22,500	*10 050 *21,850	7500 16,100			8900 19,700	5800 12,850	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	14 850 32,100	*13 200 *28,500	9900 21,400	*10 850 *23,600	7250 15,550	8550	5500	8350 18,450	5400 11,950	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 100 30,350	*14 600 *31,500	9500 20,450	11 000 23,650	7000 15,050	8400	5400	8200 18,100	5300 11,650	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	13 850 29,750	15 050 32,350	9200 19,850	10 800 23,250	6800 14,700			8450 18,600	5400 11,900	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	13 850 29,750	14 950 32,150	9150 19,650	10 750 23,100	6750 14,600			9150 20,150	5850 12,850	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	14 000 30,100	*14 000 *30,250	9200 19,800	*10 650	6850			*10 400 *22,900	6750 14,950	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	14 350 30,850	*11 100 *23,300	9500 20,500					*10 150 *22,300	8850 19,900	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications


Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7100	*7850 *17,250	6950 15,500	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	9850 21,250	*9200 *20,100	6950 14,950	*7800 *17,200	6000 13,250	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	14 100 30,450	*11 850 *25,650	9300 20,100	*9800 *21,300	6700 14,450	*8100 *17,850	5500 12,150	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	13 250 28,600	*12 950 *28,000	8850 19,100	*10 350 22,250	6450 13,900	8500 18,700	5350 11,750	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 000 27,950	*13 400 *29,050	8600 18,500	10 200 21,900	6300 13,600	8800 19,300	5500 12,100	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	13 000 27,950	*13 050 *28,250	8500 18,350	*10 050 *21,600	6300 13,550	*9500 *20,950	6000 13,250	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	13 200 28,400	*11 550 *24,850	8650 18,650			*9500 *20,950	7250 16,050	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	8950 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	10 350 22,250	*9800	7100	*8550 *18,850	6950 15,500	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	9850 21,250	*10 200 *22,300	6950 14,950	*8550 *18,800	6000 13,250	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	14 100 30,450	*13 150 *28,450	9300 20,100	10 600 22,850	6700 14,450	8700 19,150	5500 12,150	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	13 250 28,600	*14 350 *31,050	8850 19,100	10 350 22,250	6450 13,900	8500 18,700	5350 11,750	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 000 27,950	14 250 30,650	8600 18,500	10 200 21,900	6300 13,600	8800 19,300	5500 12,100	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	13 000 27,950	14 200 30,500	8500 18,350	10 150 21,900	6300 13,550	9650 21,300	6000 13,250	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	13 200 28,400	*12 900 *27,650	8650 18,650			*10 600 *23,350	7250 16,050	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7200	*7850 *17,250	7000 15,650	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	9950 21,450	*9200 *20,100	7050 15,100	*7800 *17,200	6050 13,400	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	14 200 30,700	*11 850 *25,650	9400 20,250	*9800 *21,300	6750 14,550	*8100 *17,850	5550 12,250	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	13 400 28,850	*12 950 *28,000	8950 19,250	*10 350 *22,400	6550 14,050	8600 18,900	5400 11,900	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 100 28,200	*13 400 *29,050	8650 18,650	10 300 22,100	6350 13,700	8850 19,500	5550 12,200	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	13 100 28,200	*13 050 *28,250	8600 18,500	*10 050 *21,600	6350 13,700	*9500 *20,950	6050 13,400	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	13 350 28,700	*11 550 *24,850	8750 18,850			*9500 *20,950	7300 16,200	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	10 400 22,400	*9800	7200	*8550 *18,850	7000 15,650	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	9950 21,450	*10 200 *22,300	7050 15,100	*8550 *18,800	6050 13,400	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	14 200 30,700	*13 150 *28,450	9400 20,250	10 700 23,050	6750 14,550	8800 19,350	5550 12,250	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	13 400 28,850	*14 350 *31,050	8950 19,250	10 450 22,450	6550 14,050	8600 18,900	5400 11,900	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 100 28,200	14 400 30,950	8650 18,650	10 300 22,100	6350 13,700	8850 19,500	5550 12,200	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	13 100 28,200	14 300 30,750	8600 18,500	10 250 22,100	6350 13,700	9750 21,500	6050 13,400	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	13 350 28,700	*12 900 *27,650	8750 18,850			*10 600 *23,350	7300 16,200	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7300	*7850 *17,250	7150 15,900	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	10 100 21,750	*9200 *20,100	7150 15,350	*7800 *17,200	6150 13,600	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	14 450 31,150	*11 850 *25,650	9550 20,600	*9800 *21,300	6900 14,800	*8100 *17,850	5650 12,450	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	13 600 29,300	*12 950 *28,000	9100 19,550	*10 350 *22,400	6650 14,300	8750 *19,250	5500 12,100	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 350 28,650	*13 400 *29,050	8800 19,000	10 450 22,500	6500 13,950	9000 19,850	5650 12,400	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	13 350 28,650	*13 050 *28,250	8750 18,850	*10 050 *21,600	6450 13,950	*9500 *20,950	6200 13,600	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	13 550 29,150	*11 550 *24,850	8900 19,150			*9500 *20,950	7400 16,450	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 22,700	*9800	7300	*8550 *18,850	7150 15,900	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	10 100 21,750	*10 200 *22,300	7150 15,350	*8550 *18,800	6150 13,600	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	14 450 31,150	*13 150 *28,450	9550 20,600	*10 900 23,450	6900 14,800	*8900 *19,500	5650 12,450	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	13 600 29,300	*14 350 *31,050	9100 19,550	10 650 22,850	6650 14,300	8750 19,250	5500 12,100	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 350 28,650	14 650 31,450	8800 19,000	10 450 22,500	6500 13,950	9000 19,850	5650 12,400	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	13 350 28,650	*14 500 31,300	8750 18,850	10 450 22,500	6450 13,950	9950 21,900	6200 13,600	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	13 550 29,150	*12 900 *27,650	8900 19,150			*10 600 *23,350	7400 16,450	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7350	*7850 *17,250	7150 15,950	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	10 150 21,850	*9200 *20,100	7150 15,400	*7800 *17,200	6200 13,650	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	14 500 31,300	*11 850 *25,650	9600 20,700	*9800 *21,300	6900 14,900	*8100 *17,850	5700 12,550	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	13 700 29,450	*12 950 *28,000	9150 19,650	*10 350 *22,400	6700 14,350	*8750 *19,250	5550 12,150	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 400 28,800	*13 400 *29,050	8850 19,100	10 500 22,600	6500 14,050	9050 19,950	5700 12,500	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	13 400 28,800	*13 050 *28,250	8800 18,950	*10 050 *21,600	6500 14,000	*9500 *20,950	6200 13,700	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	13 650 29,300	*11 550 *24,850	8950 19,250			*9500 *20,950	7450 16,550	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 6.8 mt (14,991 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 22,800	*9800	7350	*8550 *18,850	7150 15,950	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	10 150 21,850	*10 200 *22,300	7150 15,400	*8550 *18,800	6200 13,650	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	14 500 31,300	*13 150 *28,450	9600 20,700	*10 900 23,550	6900 14,900	*8900 *19,500	5700 12,550	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	13 700 29,450	*14 350 *31,050	9150 19,650	10 700 23,000	6700 14,350	8800 19,350	5550 12,150	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 400 28,800	14 750 31,650	8850 19,100	10 500 22,600	6500 14,050	9050 19,950	5700 12,500	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	13 400 28,800	*14 500 *31,400	8800 18,950	10 500 22,600	6500 14,000	10 000 22,000	6200 13,700	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	13 650 29,300	*12 900 *27,650	8950 19,250			*10 600 *23,350	7450 16,550	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 12,850	6000	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7850 16,900	*7400 *16,200	5900 12,650	*5150 *11,250	5050 11,200	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	10 450 22,550	*8850 *19,200	7550 16,250	*7850 *17,150	5750 12,300	*5300 *11,600	4750 10,500	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	14 900 32,100	*12 100 *26,150	9900 21,350	*9750 *21,100	7250 15,600	*8350 *18,150	5550 11,950	*5600 *12,300	4650 10,250	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	14 300 30,750	*13 200 *28,550	9500 20,450	*10 400 *22,550	7000 15,050	8400 18,100	5450 11,650	*6100 *13,450	4750 10,400	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	14 050 30,200	*13 600 *29,500	9300 20,000	*10 700 *23,150	6850 14,750	8350 17,950	5350 11,550	*6950 *15,350	5000 11,000	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	14 050 30,250	*13 300 *28,700	9250 19,900	*10 400 *22,400	6800 14,700			*8400 *18,500	5600 12,300	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	14 250 30,700	*11 950 *25,650	9350 20,200	*8950 *18,850	6950 15,050			*8550 *18,850	6750 15,050	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	*8050 17,400	*7500 *14,450	6000 12,850	*5600 *12,350	*5600 *12,350	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7850 16,900	*8250 *18,000	5900 12,650	*5650 *12,400	5050 11,200	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 450 22,550	*9800 *21,250	7550 16,250	*8750 18,800	5750 12,300	*5800 *12,750	4750 10,500	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	14 900 32,100	*13 400 *28,950	9900 21,350	*10 800 *23,400	7250 15,600	8550 18,400	5550 11,950	*6150 *13,500	4650 10,250	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	14 300 30,750	*14 600 *31,650	9500 20,450	10 950 23,600	7000 15,050	8400 18,100	5450 11,650	*6700 *14,750	4750 10,400	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	14 050 30,200	*15 100 32,500	9300 20,000	10 800 23,250	6850 14,750	8350 17,950	5350 11,550	*7600 *16,800	5000 11,000	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	14 050 30,250	*14 750 *31,850	9250 19,900	10 800 23,200	6800 14,700			8700 19,200	5600 12,300	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	14 250 30,700	*13 300 *28,500	9350 20,200	*10 000 *21,000	6950 15,050			*9550 *21,000	6750 15,050	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 *9500						*9300 *20,400	*9300 *20,400	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 12,950	6050	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	7900 17,050	*7400 *16,200	5950 12,750	*5150 *11,250	5100 *11,250	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	*10 550 *22,750	*8850 *19,200	7600 16,400	*7850 *17,150	5800 12,450	*5300 *11,600	4800 10,600	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	15 000 32,350	*12 100 *26,150	10 000 21,550	*9750 *21,100	7300 15,700	*8350 *18,150	5600 12,050	*5600 *12,300	4700 10,350	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	14 400 31,000	*13 200 *28,550	9600 20,650	*10 400 *22,550	7050 15,200	8500 18,250	5500 11,800	*6100 *13,450	4750 10,500	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	14 150 30,500	*13 600 *29,500	9350 20,200	*10 700 *23,150	6900 14,850	8400 18,100	5400 11,650	*6950 *15,350	5050 11,100	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	14 200 30,500	*13 300 *28,700	9300 20,100	*10 400 *22,400	6900 14,800			*8400 *18,500	5650 12,450	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	14 400 30,950	*11 950 *25,650	9450 20,350	*8950 *18,850	7000 15,150			*8550 *18,850	6800 15,150	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	*8050 *17,550	*7500 *14,450	6050 12,950	*5600 *12,350	*5600 *12,350	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	7900 17,050	*8250 *18,000	5950 12,750	*5650 *12,400	5100 11,300	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 550 22,750	*9800 *21,250	7600 16,400	*8750 18,950	5800 12,450	*5800 *12,750	4800 10,600	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	15 000 32,350	*13 400 *28,950	10 000 21,550	*10 800 *23,400	7300 15,700	8650 18,600	5600 12,050	*6150 *13,500	4700 10,350	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	14 400 31,000	*14 600 *31,650	9600 20,650	11 050 23,800	7050 15,200	8500 18,250	5500 11,800	*6700 *14,750	4750 10,500	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	14 150 30,500	*15 100 *32,650	9350 20,200	10 900 23,450	6900 14,850	8400 18,100	5400 11,650	*7600 *16,800	5050 11,100	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	14 200 30,500	*14 750 *31,850	9300 20,100	10 900 23,400	6900 14,800			8750 19,350	5650 12,450	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	14 400 30,950	*13 300 *28,500	9450 20,350	*10 000 *21,000	7000 15,150			*9550 *21,000	6800 15,150	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 *9500						*9300 *20,400	*9300 *20,400	6060 240



ISO 10567





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 13,150	6150 13,150	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	*7950 *17,300	*7400 *16,200	6050 12,950	*5150 *11,250	*5150 *11,250	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	*10 550 *22,800	*8850 *19,200	7700 16,600	*7850 *17,150	5850 12,600	*5300 *11,600	4900 10,800	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	15 250 32,850	*12 100 *26,150	10 150 21,850	*9750 *21,100	7400 15,950	*8350 *18,150	5700 12,250	*5600 *12,300	4800 10,500	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	14 600 31,450	*13 200 *28,550	9750 20,950	*10 400 *22,550	7150 15,450	8650 18,550	5550 11,950	*6100 *13,450	4850 10,650	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	14 400 30,950	*13 600 *29,500	9500 20,500	*10 700 *23,150	7000 15,100	8550 18,400	5500 11,850	*6950 *15,350	5150 11,300	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	14 400 30,950	*13 300 *28,700	9450 20,400	*10 400 *22,400	7000 15,050			*8400 *18,500	5700 12,650	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	14 600 31,450	*11 950 *25,650	9600 20,700	*8950 *18,850	7100 15,400			*8550 *18,850	6900 15,400	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	*8050 *17,600	*7500 13,150	6150	*5600 *12,350	*5600 *12,350	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	*8050 17,300	*8250 18,000	6050	*5650 *12,400	*5600 11,450	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 700 23,050	*9800 *21,250	7700 16,600	*8750 *19,050	5850 12,600	*5800 *12,750	4900 10,800	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	15 250 32,850	*13 400 *28,950	10 150 21,850	*10 800 *23,400	7400 15,950	8800 18,900	5700 12,250	*6150 *13,500	4800 10,500	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	14 600 31,450	*14 600 *31,650	9750 20,950	11 250 24,200	7150 15,450	8650 18,550	5550 11,950	*6700 *14,750	4850 10,650	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	14 400 30,950	*15 100 *32,650	9500 20,500	11 100 23,850	7000 15,100	8550 18,400	5500 11,850	*7600 *16,800	5150 11,300	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	14 400 30,950	*14 750 *31,850	9450 20,400	11 050 23,800	7000 15,050			8900 19,700	5700 12,650	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	14 600 31,450	*13 300 *28,500	9600 20,700	*10 000 *21,000	7100 15,400			*9550 *21,000	6900 15,400	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 *9500						*9300 *20,400	*9300 *20,400	6060 240



ISO 10567





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*5650 *12,600	*5650 *12,600	7350 290
7500 mm 300 in	kg lb									*7000 *15,400	*7000 *15,400			*5250 *11,650	*5250 *11,650	8540 340
6000 mm 240 in	kg lb									*7250 *15,900	*7250 *15,900	*6850 *13,150	6150 *13,150	*5100 *11,250	*5100 *11,250	9340 370
4500 mm 180 in	kg lb							*8900 *19,250	*8900 *19,250	*7950 *17,300	*7950 *17,300	*7400 *16,200	6050 13,000	*5150 *11,250	*5150 *11,250	9840 390
3000 mm 120 in	kg lb					*13 950 *29,950	*13 950 *29,950	*10 550 *22,800	*10 550 *22,800	*8850 *19,200	7750 16,700	*7850 *17,150	5900 12,700	*5300 *11,600	4900 10,850	10 100 400
1500 mm 60 in	kg lb					*16 800 *36,250	15 300 33,000	*12 100 *26,150	10 200 21,950	*9750 *21,100	7450 16,050	*8350 *18,150	5750 12,350	*5600 *12,300	4800 10,600	10 130 400
0 mm 0 in	kg lb			*7750 *17,650	*7750 *17,650	*18 300 *39,600	14 700 31,600	*13 200 *28,550	9800 21,050	*10 400 *22,550	7200 15,500	8700 18,650	5600 12,050	*6100 *13,450	4900 10,700	9930 390
-1500 mm -60 in	kg lb	*8150 *18,100	*8150 *18,100	*12 150 *27,450	*12 150 *27,450	*18 500 *40,100	14 450 31,100	*13 600 *29,500	9550 20,600	*10 700 *23,150	7050 15,200	8600 18,500	5500 11,900	*6950 *15,350	5150 11,350	9490 380
-3000 mm -120 in	kg lb	*12 900 *28,850	*12 900 *28,850	*17 750 *40,150	*17 750 *40,150	*17 700 *38,350	14 450 31,100	*13 300 *28,700	9500 20,500	*10 400 *22,400	7050 15,150			*8400 *18,500	5750 12,700	8770 350
-4500 mm -180 in	kg lb	*18 500 *41,600	*18 500 *41,600	*21 900 *47,250	*21 900 *47,250	*15 800 *34,000	14 700 31,600	*11 950 *25,650	9650 20,800	*8950 *18,850	7150 15,500			*8550 *18,850	6950 15,500	7690 300
-6000 mm -240 in	kg lb					*12 000 *25,300	*12 000 *25,300	*8500 *8500						*8350 *18,250	*8350 *18,250	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
9000 mm 360 in	kg lb													*6200 *13,800	*6200 *13,800	7350 290
7500 mm 300 in	kg lb									*7750 *17,050	*7750 *17,050			*5800 *12,750	*5800 *12,750	8540 340
6000 mm 240 in	kg lb									*8050 *17,600	*8050 *17,600	*7500 16,150	6150 13,200	*5600 *12,350	*5600 *12,350	9340 370
4500 mm 180 in	kg lb							*9800 *21,250	*9800 *21,250	*8800 *19,150	*8050 17,350	*8250 *18,000	6050 13,000	*5650 *12,400	*5600 11,550	9840 390
3000 mm 120 in	kg lb					*15 400 *33,100	*15 400 *33,100	*11 650 *25,200	10 750 23,150	*9800 *21,250	7750 16,700	*8750 *19,050	5900 12,700	*5800 *12,750	4900 10,850	10 100 400
1500 mm 60 in	kg lb					*18 600 *40,050	15 300 33,000	*13 400 *28,950	10 200 21,950	*10 800 *23,400	7450 16,050	8850 19,000	5750 12,350	*6150 *13,500	4800 10,600	10 130 400
0 mm 0 in	kg lb			*8250 *18,750	*8250 *18,750	*20 250 *43,800	14 700 31,600	*14 600 *31,650	9800 21,050	11 300 24,350	7200 15,500	8700 18,650	5600 12,050	*6700 *14,750	4900 10,700	9930 390
-1500 mm -60 in	kg lb	*8650 *19,250	*8650 *19,250	*12 900 *29,150	*12 900 *29,150	*20 500 *44,400	14 450 31,100	*15 100 *32,650	9550 20,600	11 150 24,000	7050 15,200	8600 18,500	5500 11,900	*7600 *16,800	5150 11,350	9490 380
-3000 mm -120 in	kg lb	*13 650 *30,550	*13 650 *30,550	*18 800 *42,550	*18 800 *42,550	*19 650 *42,500	14 450 31,100	*14 750 *31,850	9500 20,500	11 100 23,900	7050 15,150			8950 19,800	5750 12,700	8770 350
-4500 mm -180 in	kg lb	*19 600 *44,050	*19 600 *44,050	*24 300 *52,400	*24 300 *52,400	*17 500 *37,750	14 700 31,600	*13 300 *28,500	9650 20,800	*10 000 *21,000	7150 15,500			*9550 *21,000	6950 15,500	7690 300
-6000 mm -240 in	kg lb					*13 400 *28,200	*13 400 *28,200	*9500 *9500						*9300 *20,400	*9300 *20,400	6060 240



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	*8000			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	8000 17,150			*6550 *14,450	6400 14,200	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7750 16,700	*7750	5850	*6600 *14,500	5700 12,600	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	15 550 *33,500	*11 450 *24,750	10 300 22,200	*9500 *20,550	7500 16,150	*8400 *18,300	5700 12,300	*6850 *15,100	5350 11,750	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	14 650 31,600	*12 850 *27,750	9800 21,150	*10 250 *22,200	7200 15,550	8550 18,450	5600 12,000	*7350 *16,150	5200 11,450	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	14 250 30,700	*13 600 *29,500	9500 20,500	*10 750 *23,250	7050 15,150	8450 18,250	5500 11,800	*8150 *17,950	5300 11,700	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	14 200 30,500	*13 700 *29,700	9400 20,200	*10 750 *23,300	6950 14,950			8800 19,400	5700 12,500	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	14 300 30,750	*12 950 *28,000	9400 20,500	*10 050 *21,500	7000 15,050			*9150 *20,200	6500 14,350	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 400 *30,950	*10 900 *23,250	9600 20,750					*9200 *20,250	8250 18,450	6750 270

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	8050			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	8000 17,150			*7200 *15,800	6400 14,200	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	10 850 23,400	*9600 *20,900	7750 16,700	*8500	5850	*7250 *15,900	5700 12,600	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 550 33,600	*12 650 *27,400	10 300 22,200	*10 500 *22,800	7500 16,150	8700 18,750	5700 12,300	*7500 *16,500	5350 11,750	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	14 650 31,600	*14 200 *30,700	9800 21,150	11 200 24,150	7200 15,550	8550 18,450	5600 12,000	8000 17,600	5200 11,450	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	14 250 30,700	*15 100 *32,650	9500 20,500	11 000 23,650	7050 15,150	8450 18,250	5500 11,800	8200 18,000	5300 11,700	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	14 200 30,500	*15 200 32,700	9400 20,200	10 900 23,450	6950 14,950			8800 19,400	5700 12,500	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	14 300 30,750	*14 350 *31,050	9400 20,250	10 950 23,550	7000 15,050			10 100 22,350	6500 14,350	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	14 600 31,400	*12 150 *25,800	9600 20,750					*10 250 *22,550	8250 18,450	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	*8000			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	8050 17,300			*6550 *14,450	6450 14,350	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7850 16,850	*7750	5900	*6600 *14,500	5750 12,700	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	*15 600 *33,500	*11 450 *24,750	10 400 22,400	*9500 *20,550	7550 16,250	*8400 *18,300	5750 12,400	*6850 *15,100	5400 11,850	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	14 800 31,850	*12 850 *27,750	9900 21,350	*10 250 *22,200	7300 15,700	8650 18,600	5650 12,100	*7350 *16,150	5250 11,600	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	14 400 30,950	*13 600 *29,500	9600 20,650	*10 750 *23,250	7100 15,250	8550 18,400	5550 11,900	*8150 *17,950	5350 11,800	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	14 300 30,750	*13 700 *29,700	9450 20,350	*10 750 *23,300	7000 15,100			8850 19,550	5750 12,650	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	14 400 31,000	*12 950 *28,000	9500 20,450	*10 050 *21,500	7050 15,200			*9150 *20,200	6550 14,450	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 400 *30,950	*10 900 *23,250	9700 20,950					*9200 *20,250	8300 18,600	6750 270

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	8100			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	8050 17,300			*7200 *15,800	6450 14,350	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	*10 950 23,600	*9600 *20,900	7850 16,850	*8500	5900	*7250 *15,900	5750 12,700	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 700 33,850	*12 650 *27,400	10 400 22,400	*10 500 *22,800	7550 16,250	8800 18,900	5750 12,400	*7500 *16,500	5400 11,850	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	14 800 31,850	*14 200 *30,700	9900 21,350	11 300 24,350	7300 15,700	8650 18,600	5650 12,100	*8050 *17,650	5250 11,600	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	14 400 30,950	*15 100 *32,650	9600 20,650	11 100 23,900	7100 15,250	8550 18,400	5550 11,900	8250 18,200	5350 11,800	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	14 300 30,750	*15 200 *32,850	9450 20,350	11 000 23,650	7000 15,100			8850 19,550	5750 12,650	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	14 400 31,000	*14 350 *31,050	9500 20,450	11 050 23,800	7050 15,200			10 200 *22,450	6550 14,450	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	14 700 31,650	*12 150 *25,800	9700 20,950					*10 250 *22,550	8300 18,600	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	*8000			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	*8100 17,550			*6550 *14,450	6550 *14,450	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	7950 17,100	*7750	6000	*6600 *14,500	5850 12,900	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	*15 600 *33,500	*11 450 *24,750	10 550 22,700	*9500 *20,550	7650 16,500	*8400 *18,300	5850 12,600	*6850 *15,100	5450 12,050	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	15 000 32,300	*12 850 *27,750	10 050 21,650	*10 250 *22,200	7400 15,950	*8750 18,900	5700 12,300	*7350 *16,150	5350 11,750	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	14 600 31,450	*13 600 *29,500	9750 21,000	*10 750 *23,250	7200 15,500	8700 18,700	5650 12,100	*8150 *17,950	5450 12,000	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	14 550 31,250	*13 700 *29,700	9600 20,700	*10 750 *23,300	7100 15,300			*8950 *19,650	5800 12,850	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	14 650 31,500	*12 950 *28,000	9650 20,750	*10 050 *21,500	7150 15,400			*9150 *20,200	6650 14,700	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 400 *30,950	*10 900 *23,250	9850 21,250					*9200 *20,250	8450 18,900	6750 270

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	8250			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	8150 17,550			*7200 *15,800	6550 14,550	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	*10 950 *23,650	*9600 *20,900	7950 17,100	*8500	6000	*7250 *15,900	5850 12,900	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 900 34,300	*12 650 *27,400	10 550 22,700	*10 500 *22,800	7650 16,500	8950 19,200	5850 12,600	*7500 *16,500	5450 12,050	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	15 000 32,300	*14 200 *30,700	10 050 21,650	*11 350 *24,600	7400 15,950	8800 18,900	5700 12,300	*8050 *17,650	5350 11,750	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	14 600 31,450	*15 100 *32,650	9750 21,000	11 300 24,250	7200 15,500	8700 18,700	5650 12,100	8400 18,500	5450 12,000	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	14 550 31,250	*15 200 *32,850	9600 20,700	11 200 24,050	7100 15,300			9000 19,900	5800 12,850	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	14 650 31,500	*14 350 *31,050	9650 20,750	*11 150 *23,850	7150 15,400			*10 200 *22,450	6650 14,700	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	14 950 32,150	*12 150 *25,800	9850 21,250					*10 250 *22,550	8450 18,900	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8000	*8000			*6750 *14,900	*6750 *14,900	7700 300
6000 mm 240 in	kg lb							*8100 *17,700	*8100 17,600			*6550 *14,450	*6550 *14,450	8580 340
4500 mm 180 in	kg lb			*12 300	*12 300	*9900 *21,450	*9900 *21,450	*8700 *18,900	8000 17,150	*7750	6000	*6600 *14,500	5850 12,950	9130 360
3000 mm 120 in	kg lb			*15 600 *33,500	*15 600 *33,500	*11 450 *24,750	10 600 22,800	*9500 *20,550	7700 16,600	*8400 *18,300	5900 12,650	*6850 *15,100	5500 12,100	9410 370
1500 mm 60 in	kg lb			*17 950 *38,750	15 050 32,450	*12 850 *27,750	10 100 21,750	*10 250 *22,200	7450 16,000	*8750 *19,000	5750 12,350	*7350 *16,150	5350 11,800	9440 380
0 mm 0 in	kg lb			*18 750 *40,550	14 700 31,600	*13 600 *29,500	9800 21,100	*10 750 *23,250	7250 15,600	8750 18,800	5650 12,200	*8150 *17,950	5500 12,050	9220 370
-1500 mm -60 in	kg lb	*13 300 *30,050	*13 300 *30,050	*18 350 *39,800	14 600 31,400	*13 700 *29,700	9650 20,800	*10 750 *23,300	7150 15,400			*8950 *19,650	5850 12,900	8750 350
-3000 mm -120 in	kg lb	*20 950 *47,450	*20 950 *47,450	*17 000 *36,850	14 700 31,650	*12 950 *28,000	9700 20,850	*10 050 *21,500	7200 15,500			*9150 *20,200	6650 14,750	7960 320
-4500 mm -180 in	kg lb	*19 150 *41,200	*19 150 *41,200	*14 400 *30,950	14 400 *30,950	*10 900 *23,250	9900 21,350					*9200 *20,250	8500 18,950	6750 270

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb							*8750	8250			*7400 *16,300	*7400 *16,300	7700 300
6000 mm 240 in	kg lb							*8950 *19,550	8200 17,600			*7200 *15,800	6600 14,600	8580 340
4500 mm 180 in	kg lb			*13 550	*13 550	*10 950 *23,650	*10 950 *23,650	*9600 *20,900	8000 17,150	*8500	6000	*7250 *15,900	5850 12,950	9130 360
3000 mm 120 in	kg lb			*17 200 *37,000	15 950 34,450	*12 650 *27,400	10 600 22,800	*10 500 *22,800	7700 16,600	9000 19,300	5900 12,650	*7500 *16,500	5500 12,100	9410 370
1500 mm 60 in	kg lb			*19 850 *42,800	15 050 32,450	*14 200 *30,700	10 100 21,750	*11 350 *24,600	7450 16,000	8850 19,000	5750 12,350	*8050 *17,650	5350 11,800	9440 380
0 mm 0 in	kg lb			*20 700 *44,850	14 700 31,600	*15 100 *32,650	9800 21,100	11 350 24,400	7250 15,600	8750 18,800	5650 12,200	8450 18,600	5500 12,050	9220 370
-1500 mm -60 in	kg lb	*14 100 *31,850	*14 100 *31,850	*20 300 *44,050	14 600 31,400	*15 200 *32,850	9650 20,800	11 250 24,150	7150 15,400			9050 20,000	5850 12,900	8750 350
-3000 mm -120 in	kg lb	*22 200 *50,250	*22 200 *50,250	*18 850 *40,800	14 700 31,650	*14 350 *31,050	9700 20,850	*11 150 *23,850	7200 15,500			*10 200 *22,450	6650 14,750	7960 320
-4500 mm -180 in	kg lb	*21 250 *45,750	*21 250 *45,750	*16 000 *34,400	15 000 32,300	*12 150 *25,800	9900 21,350					*10 250 *22,550	8500 18,950	6750 270



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
7500 mm 300 in	kg lb											*8550 *18,950	8250 18,500	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	7900 17,000			*8200 *18,100	6750 15,050	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 *22,600	*9100 *19,750	7700 16,600			*8200 *18,100	6000 13,250	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	15 300 33,050	*11 950 *25,800	10 250 22,050	*9800 *21,300	7450 16,050	*8700	5700	*8500 *18,650	5600 12,350	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 550 31,350	*13 200 *28,500	9800 21,100	*10 500 *22,750	7200 15,550	8600	5600	8400 18,500	5500 12,050	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	14 300 30,750	*13 800 *29,850	9500 20,500	*10 900 *23,550	7050 15,200			8650 19,000	5600 12,350	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	14 300 30,700	*13 650 *29,600	9450 20,300	*10 750 *23,200	7000 15,100			*9250 *20,350	6050 13,300	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	14 450 31,050	*12 650 *27,300	9500 20,500	*9600	7100			*9350 *20,600	7000 15,450	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	9800 *20,950					*9100 *20,000	*9100 *20,000	6330 250

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
7500 mm 300 in	kg lb											*9350 *20,650	8250 18,500	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	7900 17,000			*9000 *19,800	6750 15,050	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 750 23,200	*10 050 *21,850	7700 16,600			*9000 *19,750	6000 13,250	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	15 300 33,050	*13 200 *28,500	10 250 22,050	*10 850 *23,600	7450 16,050	8700	5700	8550 18,850	5600 12,350	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 550 31,350	*14 600 *31,500	9800 21,100	11 200 24,100	7200 15,550	8600	5600	8400 18,500	5500 12,050	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	14 300 30,750	*15 250 *33,050	9500 20,500	11 000 23,700	7050 15,200			8650 19,000	5600 12,350	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	14 300 30,700	*15 150 *32,750	9450 20,300	10 950 23,600	7000 15,100			9350 20,600	6050 13,300	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	14 450 31,050	*14 000 *30,250	9500 20,500	*10 650	7100			*10 400 *22,900	7000 15,450	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	14 800 31,850	*11 100 *23,300	9800 21,150					*10 150 *22,300	9150 20,550	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	8300 18,650	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	8000 17,150			*8200 *18,100	6800 15,150	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 *22,600	*9100 *19,750	7800 16,750			*8200 *18,100	6050 13,350	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	15 450 33,300	*11 950 *25,800	10 300 22,250	*9800 *21,300	7500 16,200	*8700	5750	*8500 *18,650	5650 12,450	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 650 31,600	*13 200 *28,500	9850 21,250	*10 500 *22,750	7300 15,700	8650	5650	8450 18,650	5550 12,150	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	14 400 31,000	*13 800 *29,850	9600 20,700	*10 900 *23,550	7100 15,350			8700 19,150	5650 12,450	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	14 400 31,000	*13 650 *29,600	9500 20,500	*10 750 *23,200	7050 15,200			*9250 *20,350	6100 13,400	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	14 550 31,300	*12 650 *27,300	9600 20,650	*9600	7150			*9350 *20,600	7050 15,600	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	9850 *20,950					*9100 *20,000	*9100 *20,000	6330 250

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	8300 18,650	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	8000 17,150			*9000 *19,800	6800 15,150	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	10 850 23,350	*10 050 *21,850	7800 16,750			*9000 *19,750	6050 13,350	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	15 450 33,300	*13 200 *28,500	10 300 22,250	*10 850 *23,600	7500 16,200	8800	5750	8600 19,000	5650 12,450	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 650 31,600	*14 600 *31,500	9850 21,250	11 300 24,350	7300 15,700	8650	5650	8450 18,650	5550 12,150	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	14 400 31,000	*15 250 *33,050	9600 20,700	11 100 23,950	7100 15,350			8700 19,150	5650 12,450	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	14 400 31,000	*15 150 *32,750	9500 20,500	11 050 23,800	7050 15,200			9400 20,750	6100 13,400	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	14 550 31,300	*14 000 *30,250	9600 20,650	*10 650	7150			*10 400 *22,900	7050 15,600	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	*14 900 *31,900	*11 100 *23,300	9850 21,350					*10 150 *22,300	9250 20,700	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	8400 18,900	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	8100 17,400			*8200 *18,100	6900 15,400	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 *22,600	*9100 *19,750	7900 17,000			*8200 *18,100	6150 13,550	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	15 650 33,800	*11 950 *25,800	10 450 22,550	*9800 *21,300	7650 16,450	*8700	5850	*8500 *18,650	5750 12,650	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 900 32,100	*13 200 *28,500	10 000 21,600	*10 500 *22,750	7400 15,950	8800	5750	8600 18,950	5600 12,350	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	14 650 31,500	*13 800 *29,850	9750 21,000	*10 900 *23,550	7250 15,550			8850 19,500	5750 12,650	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	14 650 31,450	*13 650 *29,600	9650 20,800	*10 750 *23,200	7150 15,450			*9250 *20,350	6200 13,650	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	14 800 31,800	*12 650 *27,300	9750 21,000	*9600	7250			*9350 *20,600	7150 15,850	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	*10 000 *20,950					*9100 *20,000	*9100 *20,000	6330 250

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	8400 18,900	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	8100 17,400			*9000 *19,800	6900 15,400	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	11 000 23,700	*10 050 *21,850	7900 17,000			*9000 *19,750	6150 13,550	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	15 650 33,800	*13 200 *28,500	10 450 22,550	*10 850 *23,600	7650 16,450	8900	5850	8750 19,300	5750 12,650	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 900 32,100	*14 600 *31,500	10 000 21,600	11 500 24,700	7400 15,950	8800	5750	8600 18,950	5600 12,350	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	14 650 31,500	*15 250 *33,050	9750 21,000	11 300 24,300	7250 15,550			8850 19,500	5750 12,650	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	14 650 31,450	*15 150 *32,750	9650 20,800	11 250 24,200	7150 15,450			9550 21,100	6200 13,650	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	14 800 31,800	*14 000 *30,250	9750 21,000	*10 650	7250			*10 400 *22,900	7150 15,850	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	*14 900 *31,900	*11 100 *23,300	10 000 21,650					*10 150 *22,300	9350 21,000	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



336 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*8550 *18,950	8450 *18,950	7340 290
6000 mm 240 in	kg lb					*9200 *20,000	*9200 *20,000	*8550 *18,750	8150 17,450			*8200 *18,100	6950 15,450	8250 330
4500 mm 180 in	kg lb			*13 300 *28,500	*13 300 *28,500	*10 450 *22,600	*10 450 *22,600	*9100 *19,750	7950 17,050			*8200 *18,100	6150 13,650	8820 350
3000 mm 120 in	kg lb			*16 500 *35,450	15 700 33,950	*11 950 *25,800	10 500 22,650	*9800 *21,300	7650 16,500	*8700	5900	*8500 *18,650	5750 12,700	9110 360
1500 mm 60 in	kg lb			*15 950 *38,800	14 950 32,250	*13 200 *28,500	10 050 21,700	*10 500 *22,750	7450 16,000	8850	5750	8650 19,050	5650 12,400	9140 360
0 mm 0 in	kg lb			*18 750 *40,700	14 700 31,650	*13 800 *29,850	9800 21,100	*10 900 *23,550	7250 15,650			8900 19,600	5750 12,700	8920 350
-1500 mm -60 in	kg lb	*12 400 *28,200	*12 400 *28,200	*18 100 *39,250	14 700 31,600	*13 650 *29,600	9700 20,900	*10 750 *23,200	7200 15,550			*9250 *20,350	6200 13,700	8420 340
-3000 mm -120 in	kg lb	*21 650 *47,050	*21 650 *47,050	*16 450 *35,650	14 850 31,950	*12 650 *27,300	9800 21,100	*9600	7300			*9350 *20,600	7200 15,900	7600 300
-4500 mm -180 in	kg lb	*17 250 *37,150	*17 250 *37,150	*13 400 *28,700	*13 400 *28,700	*10 000 *20,950	*10 000 *20,950					*9100 *20,000	*9100 *20,000	6330 250

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
														
7500 mm 300 in	kg lb											*9350 *20,650	8450 19,000	7340 290
6000 mm 240 in	kg lb					*10 150 *22,050	*10 150 *22,050	*9450 *20,700	8150 17,450			*9000 *19,800	6950 15,450	8250 330
4500 mm 180 in	kg lb			*14 650 *31,400	*14 650 *31,400	*11 550 *24,950	11 050 23,800	*10 050 *21,850	7950 17,050			*9000 *19,750	6150 13,650	8820 350
3000 mm 120 in	kg lb			*18 250 *39,150	15 700 33,950	*13 200 *28,500	10 500 22,650	*10 850 *23,600	7650 16,500	8950	5900	8800 19,400	5750 12,700	9110 360
1500 mm 60 in	kg lb			*16 850 *41,100	14 950 32,250	*14 600 *31,500	10 050 21,700	11 550 24,850	7450 16,000	8850	5750	8650 19,050	5650 12,400	9140 360
0 mm 0 in	kg lb			*19 850 *45,000	14 700 31,650	*15 250 *33,050	9800 21,100	11 350 24,450	7250 15,650			8900 19,600	5750 12,700	8920 350
-1500 mm -60 in	kg lb	*13 150 *29,900	*13 150 *29,900	*20 000 *43,400	14 700 31,600	*15 150 *32,750	9700 20,900	11 300 24,300	7200 15,550			9600 21,200	6200 13,700	8420 340
-3000 mm -120 in	kg lb	*23 600 *52,150	*23 600 *52,150	*18 250 *39,500	14 850 31,950	*14 000 *30,250	9800 21,100	*10 650	7300			*10 400 *22,900	7200 15,900	7600 300
-4500 mm -180 in	kg lb	*19 200 *41,300	*19 200 *41,300	*14 900 *31,900	*14 900 *31,900	*11 100 *23,300	10 050 21,750					*10 150 *22,300	9400 21,100	6330 250



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications


Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7550	*7850 *17,250	7400 16,500	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	10 450 22,550	*9200 *20,100	7400 15,900	*7800 *17,200	6400 14,150	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	14 950 32,300	*11 850 *25,650	9900 21,350	*9800 *21,300	7150 15,400	*8100 *17,850	5900 12,950	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	14 150 30,450	*12 950 *28,000	9450 20,350	*10 350 *22,400	6900 14,850	*8750 *19,250	5750 12,600	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 850 29,800	*13 400 *29,050	9150 19,750	*10 550 *22,800	6750 14,550	9250 20,400	5900 12,950	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	13 850 29,800	*13 050 *28,250	9100 19,600	*10 050 *21,600	6750 14,500	*9500 *20,950	6450 14,200	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	14 100 30,300	*11 550 *24,850	9250 19,900			*9500 *20,950	7700 17,100	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 *22,850	*9800	7550	*8550 *18,850	7400 16,500	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	10 450 22,550	*10 200 *22,300	7400 15,900	*8550 *18,800	6400 14,150	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	14 950 32,300	*13 150 *28,450	9900 21,350	*10 900 *23,650	7150 15,400	*8900 *19,500	5900 12,950	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	14 150 30,450	*14 350 *31,050	9450 20,350	10 900 23,500	6900 14,850	9000 19,750	5750 12,600	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 850 29,800	*14 900 *32,250	9150 19,750	10 750 23,100	6750 14,550	9250 20,400	5900 12,950	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	13 850 29,800	*14 500 *31,400	9100 19,600	10 700 23,100	6750 14,500	10 200 22,500	6450 14,200	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	14 100 30,300	*12 900 *27,650	9250 19,900			*10 600 *23,350	7700 17,100	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications


Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7600	*7850 *17,250	7450 16,600	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	*10 550 22,700	*9200 *20,100	7450 16,050	*7800 *17,200	6450 14,250	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	15 100 32,550	*11 850 *25,650	10 000 21,500	*9800 *21,300	7200 15,500	*8100 *17,850	5950 13,100	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	14 250 30,700	*12 950 *28,000	9500 20,500	*10 350 *22,400	6950 15,000	*8750 *19,250	5800 12,700	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	13 950 30,050	*13 400 *29,050	9250 19,900	*10 550 *22,800	6800 14,650	*9350 *20,600	5950 13,050	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	14 000 30,050	*13 050 *28,250	9200 19,750	*10 050 *21,600	6800 14,650	*9500 *20,950	6500 14,300	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	14 200 30,550	*11 550 *24,850	9300 20,100			*9500 *20,950	7800 17,250	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 *22,850	*9800	7600	*8550 *18,850	7450 16,600	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	*10 550 22,700	*10 200 *22,300	7450 16,050	*8550 *18,800	6450 14,250	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	15 100 32,550	*13 150 *28,450	10 000 21,500	*10 900 *23,650	7200 15,500	*8900 *19,500	5950 13,100	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	14 250 30,700	*14 350 *31,050	9500 20,500	11 000 23,700	6950 15,000	9050 19,950	5800 12,700	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	13 950 30,050	*14 900 *32,250	9250 19,900	10 850 23,300	6800 14,650	9350 20,600	5950 13,050	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	14 000 30,050	*14 500 *31,400	9200 19,750	10 800 23,300	6800 14,650	10 300 22,700	6500 14,300	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	14 200 30,550	*12 900 *27,650	9300 20,100			*10 600 *23,350	7800 17,250	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7750	*7850 *17,250	7550 16,850	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	*10 550 *22,800	*9200 *20,100	7600 16,300	*7800 *17,200	6550 14,450	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	15 300 33,000	*11 850 *25,650	10 150 21,850	*9800 *21,300	7300 15,750	*8100 *17,850	6050 13,300	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	14 450 31,150	*12 950 *28,000	9650 20,850	*10 350 *22,400	7100 15,250	*8750 *19,250	5850 12,900	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	14 200 30,500	*13 400 *29,050	9400 20,250	*10 550 *22,800	6900 14,900	*9350 *20,600	6050 13,250	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	14 200 30,550	*13 050 *28,250	9350 20,100	*10 050 *21,600	6900 14,900	*9500 *20,950	6600 14,550	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	14 400 31,000	*11 550 *24,850	9450 20,400			*9500 *20,950	7900 17,550	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 *22,850	*9800	7750	*8550 *18,850	7550 16,850	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	10 700 23,000	*10 200 *22,300	7600 16,300	*8550 *18,800	6550 14,450	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	15 300 33,000	*13 150 *28,450	10 150 21,850	*10 900 *23,650	7300 15,750	*8900 *19,500	6050 13,300	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	14 450 31,150	*14 350 *31,050	9650 20,850	11 200 24,100	7100 15,250	9200 20,300	5850 12,900	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	14 200 30,500	*14 900 *32,250	9400 20,250	11 000 23,700	6900 14,900	9500 20,950	6050 13,250	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	14 200 30,550	*14 500 *31,400	9350 20,100	11 000 23,700	6900 14,900	10 450 23,100	6600 14,550	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	14 400 31,000	*12 900 *27,650	9450 20,400			*10 600 *23,350	7900 17,550	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




336 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*9150 *20,250	*9150 *20,250			*8200 *18,200	*8200 *18,200	6580 260
6000 mm 240 in	kg lb					*9500 *20,650	*9500 *20,650	*8950	7750	*7850 *17,250	7600 16,950	7600 300
4500 mm 180 in	kg lb			*13 300 *28,550	*13 300 *28,550	*10 550 *22,800	*10 550 *22,800	*9200 *20,100	7600 16,350	*7800 *17,200	6550 14,550	8210 330
3000 mm 120 in	kg lb			*16 250 *34,900	15 350 33,150	*11 850 *25,650	10 200 21,950	*9800 *21,300	7350 15,850	*8100 *17,850	6050 13,350	8520 340
1500 mm 60 in	kg lb			*18 050 *38,950	14 550 31,300	*12 950 *28,000	9700 20,950	*10 350 *22,400	7100 15,300	*8750 *19,250	5900 13,000	8550 340
0 mm 0 in	kg lb			*18 200 *39,500	14 250 30,650	*13 400 *29,050	9450 20,350	*10 550 *22,800	6950 15,000	*9350 *20,600	6050 13,350	8310 330
-1500 mm -60 in	kg lb	*16 800 *38,150	*16 800 *38,150	*17 300 *37,500	14 250 30,700	*13 050 *28,250	9350 20,200	*10 050 *21,600	6950 14,950	*9500 *20,950	6650 14,600	7780 310
-3000 mm -120 in	kg lb	*19 750 *42,950	*19 750 *42,950	*15 200 *32,900	14 500 31,150	*11 550 *24,850	9500 20,500			*9500 *20,950	7950 17,650	6880 270
-4500 mm -180 in	kg lb			*11 150 *23,500	*11 150 *23,500					*8800 *19,150	*8800 *19,150	5430 210

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,667 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					*10 150 *22,350	*10 150 *22,350			*9000 *19,900	*9000 *19,900	6580 260
6000 mm 240 in	kg lb					*10 500 *22,850	*10 500 *22,850	*9800	7750	*8550 *18,850	7600 16,950	7600 300
4500 mm 180 in	kg lb			*14 650 *31,550	*14 650 *31,550	*11 650 *25,250	10 750 23,100	*10 200 *22,300	7600 16,350	*8550 *18,800	6550 14,550	8210 330
3000 mm 120 in	kg lb			*18 000 *38,650	15 350 33,150	*13 150 *28,450	10 200 21,950	*10 900 *23,650	7350 15,850	*8900 *19,500	6050 13,350	8520 340
1500 mm 60 in	kg lb			*20 000 *43,150	14 550 31,300	*14 350 *31,050	9700 20,950	11 250 24,200	7100 15,300	9250 20,400	5900 13,000	8550 340
0 mm 0 in	kg lb			*20 200 *43,800	14 250 30,650	*14 900 *32,250	9450 20,350	11 050 23,850	6950 15,000	9550 21,050	6050 13,350	8310 330
-1500 mm -60 in	kg lb	*17 800 *40,400	*17 800 *40,400	*19 200 *41,600	14 250 30,700	*14 500 *31,400	9350 20,200	11 050 23,800	6950 14,950	10 500 23,200	6650 14,600	7780 310
-3000 mm -120 in	kg lb	*22 000 *47,800	*22 000 *47,800	*16 950 *36,600	14 500 31,150	*12 900 *27,650	9500 20,500			*10 600 *23,350	7950 17,650	6880 270
-4500 mm -180 in	kg lb			*12 450 *26,300	*12 450 *26,300					*9850 *21,500	*9850 *21,500	5430 210



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

336 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	6.8 mt (14,991 lb) Counterweight				7.56 mt (16,667 lb) Counterweight			
		mm	in	m³	yd³	kg	lb		%	Reach Boom			Mass Boom	Reach Boom		
								R2.8 (9'2")		R3.2 (10'6")	R3.9 (12'10")	M2.55 (8'4")	R2.8 (9'2")	R3.2 (10'6")	R3.9 (12'10")	M2.55 (8'4")
Pin-On (No Quick Coupler)																
Heavy Duty	DB	750	30	0.73	0.95	1006	2,218	100	●	●	●		●	●	●	
	DB	900	36	0.95	1.24	1152	2,540	100	●	●	●		●	●	●	
	DB	1050	42	1.17	1.54	1242	2,738	100	●	●	●		●	●	●	
	DB	1200	48	1.40	1.84	1372	3,025	100	●	●	●		●	●	●	
	DB	1350	54	1.64	2.14	1468	3,236	100	●	●	⊙		●	●	●	
	DB	1500	60	1.88	2.46	1598	3,523	100	●	⊙	⊖		●	●	⊙	
	DB	1650	66	2.12	2.77	1729	3,812	100	⊙	⊖	○		●	⊙	⊖	
	DB	1800	72	2.36	3.08	1826	4,026	100	⊖	⊖	○		⊙	⊖	○	
Severe Duty	DB	1200	48	1.40	1.84	1468	3,236	90	●	●	●		●	●	●	
Ditch Cleaning (no adjuster)	DB	1800	72	1.96	2.56	1034	2,280	100	●	●	⊙		●	●	●	
Mud and Clean-up (no adjuster)	DB	1800	72	2.48	3.24	1331	2,934	100	⊖	⊖	○		⊙	⊙	⊖	
	DB	2000	78	2.74	3.58	1417	3,124	100	⊖	○	○		⊖	⊖	○	
Maximum load with pin-on (payload + bucket)								kg	5525	5225	4565		6045	5730	5020	
								lb	12,181	11,519	10,064		13,327	12,632	11,067	
With Cat Pin Grabber Coupler																
Heavy Duty	DB	750	30	0.73	0.95	1006	2,218	100	●	●	●		●	●	●	
	DB	900	36	0.95	1.24	1152	2,540	100	●	●	●		●	●	●	
	DB	1050	42	1.17	1.54	1242	2,738	100	●	●	●		●	●	●	
	DB	1200	48	1.40	1.84	1372	3,025	100	●	●	⊙		●	●	●	
	DB	1350	54	1.64	2.14	1468	3,236	100	●	⊙	⊖		●	●	⊙	
	DB	1500	60	1.88	2.46	1598	3,523	100	⊙	⊖	○		●	⊙	⊖	
	DB	1650	66	2.12	2.77	1729	3,812	100	⊖	○	◇		⊙	⊖	○	
	DB	1800	72	2.36	3.08	1826	4,026	100	○	○	◇		⊖	○	◇	
Severe Duty	DB	1200	48	1.40	1.84	1468	3,236	90	●	●	⊙		●	●	●	
Ditch Cleaning (no adjuster)	DB	1800	72	1.96	2.56	1034	2,280	100	⊙	⊙	⊖		●	●	⊖	
Mud and Clean-up (no adjuster)	DB	1800	72	2.48	3.24	1331	2,934	100	○	○	◇		⊖	⊖	○	
	DB	2000	78	2.74	3.58	1417	3,124	100	○	◇	◇		⊖	○	◇	
Maximum load with coupler (payload + bucket)								kg	4827	4530	3867		5349	5032	4326	
								lb	10,642	9,988	8,526		11,793	11,094	9,538	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

Attachments Offering Guide

PIN-ON ATTACHMENTS

Boom Type		Reach Boom			Mass Boom
Stick Size		R2.8 (9'2")	R3.2 (10'6")	R3.9 (12'10")	M2.55 (8'4")
Hydraulic Hammers	H140Es	✓	✓	✓	✓
	H160Es	✓	✓	✓	✓
	B35	✓	✓	✓	✓
Demolition and Sorting Grapples	G325B	✓	✓	✓	
	G330	✓	✓	✓	✓
Rippers		✓	✓	✓	✓
Cat Pin Grabber Couplers		✓	✓	✓	✓
Dedicated Quick Couplers		✓	✓	✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Boom Type		Reach Boom			Mass Boom
Stick Size		R2.8 (9'2")	R3.2 (10'6")	R3.9 (12'10")	M2.55 (8'4")
Hydraulic Hammers	H140Es	✓	✓	✓	✓
	H160Es	✓	✓	✓	✓
	B35	✓	✓	✓	✓
Demolition and Sorting Grapples	G325B	✓	✓	✓*	
	G330	✓	✓*		
Rippers		✓	✓	✓	✓

*Over the front only.

336 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ENGINE			UNDERCARRIAGE AND STRUCTURES		
Cat C9.3B Tier 4 Final diesel engine	✓		Towing eye on base frame	✓	
Cold start block heaters		✓	Track guiding guard, full length		✓
Three selectable modes: Power, Smart, Eco	✓		Track guiding guard, segmented two piece		✓
One-touch low idle with automatic engine speed control	✓		Swivel guard		✓
52° C (126° F) high-ambient cooling capacity	✓		HD bottom guard		✓
Hydraulic reverse fan		✓	HD travel motor guard		✓
-18° C (0° F) cold start capability	✓		Grease lubricated track	✓	
Double element air filter with integrated precleaner	✓		HD swing frame		✓
Dual stage four micron main filter and 10 micron primary filter with water separator and water separator indicator switch	✓		HD swing bearing		✓
Biodiesel capability up to B20	✓		Base frame with HD rollers	✓	
HYDRAULIC SYSTEM			6.8 mt (14,991 lb) counterweight		✓
Boom and stick regeneration circuit	✓		7.56 mt (16,667 lb) counterweight		✓
Electronic main control valve	✓		600 mm (24") double grouser track shoes		✓
Heavy lift mode		✓	600 mm (24") triple grouser track shoes		✓
Automatic hydraulic oil warm up	✓		700 mm (28") triple grouser track shoes		✓
Bio hydraulic oil capability	✓		800 mm (31") triple grouser track shoes		✓
Fine swing		✓	850 mm (33") triple grouser track shoes		✓
Combined two-way auxiliary circuit		✓	BOOMS, STICKS AND LINKAGES		
Medium-pressure auxiliary circuit		✓	6.18 m (20'3") Mass boom		✓
Quick coupler circuit for Cat Pin Grabber and CW Dedicated		✓	6.5 m (21'4") Reach boom		✓
			2.55 m (8'4") stick		✓
			2.8 m (9'2") stick		✓
			3.2 m (10'6") stick		✓
			3.9 m (12'10") stick		✓
			Bucket linkage, TB family with lifting eye, Cat GRADE		✓
			Bucket linkage, DB family with lifting eye, Cat GRADE		✓

(continued on next page)

336 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ELECTRICAL SYSTEM			SERVICE AND MAINTENANCE		
Maintenance-free 1,000 CCA batteries (×2)	✓		Grouped location of engine oil and fuel filters	✓	
Centralized electrical disconnect switch	✓		Scheduled Oil Sampling (S·O·S SM) ports	✓	
LED chassis light, LH and RH boom lights, cab lights	✓		Preventative maintenance ready (QuickEvac TM)		✓
CAT CONNECT TECHNOLOGY			SAFETY AND SECURITY		
Cat Product Link TM	✓		Caterpillar One Key security system	✓	
Cat GRADE with 2D	✓		Lockable external tool/storage box	✓	
Cat GRADE with Advanced 2D		✓	Lockable door, fuel, and hydraulic tank locks	✓	
Cat GRADE with 3D		✓	Lockable fuel drain compartment	✓	
Cat Assist:	✓		Service platform with anti-skid plate and recessed bolts	✓	
– Boom Assist			RH handrail and hand hold (ISO 2867:2011 compliant)	✓	
– Bucket Assist			Signaling/warning horn	✓	
– Swing Assist			Ground-level secondary engine shutoff switch	✓	
– Grade Assist			Boom lowering check valve		✓
Cat Payload:	✓		Stick lowering check valve		✓
– Static Weigh			Rearview camera	✓	
– Auto Calibration			360° visibility		✓
– Payload/Cycle Information					

336 Attachments

Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Radial lower wiper
- LH/RH electrical pedal for tool control
- Rain protector plus cab light cover

SAFETY AND SECURITY

- Bluetooth® key fob

GUARDS

- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Full protecting vandalism guard

ELECTRICAL

- Premium lights, 1,200 lumens on chassis, 850 lumens on boom and cab

336 Cab Options

Cab Options

	Deluxe
ROPS, standard sound suppression	●
High-resolution 254 mm (10") LCD touchscreen monitor	●
High-resolution 254 mm (10") LCD touchscreen monitor + additional monitor (only for use with 360° visibility and Cat GRADE with Advanced 2D or Cat GRADE with 3D)	○
Automatic bi-level air conditioner	●
Jog dial and shortcut keys for monitor control	●
Keyless push-to-start engine control	●
Height-adjustable console, infinite with no tool	●
Heated seat with air-adjustable suspension	●
51 mm (2") seat belt	●
Tilt-up left-side console	●
Bluetooth integrated radio with USB ports	●
12V DC outlets (×2)	●
Document storage	●
Cup and bottle holders	●
Openable two-piece front window	●
Radial wiper with washer	●
Openable polycarbonate skylight hatch	●
LED dome and lower interior lights	●
Roller rear sunscreen	○

● Standard

○ Optional

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2019 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2240-01 (02-2019)
Replaces AEXQ2240
Build Number: 07A
(Aus-NZ, S. Korea)

