


Lift Capacities



Rating over front



Rating over side or 360 degrees

SK380SR_{LC}











SK380SRLC













A - Reach from swing centerline to arm top

B - Arm top height above/below ground

C - Lift point

Relief valve setting: 37.8 MPa

SK380SRLC		Arm: 2.40m Bucket: without Counterweight: 9,000kg Shoe: 600mm										
B	A	3.0 m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
												
9.0m	kg									*8,950	*8,950	5.04 m
7.5m	kg					*8,630	*8,630			*7,680	7,080	6.72 m
6.0m	kg			*10,240	*10,240	*9,010	8,450	*8,510	5,870	*7,230	5,540	7.74 m
4.5m	kg			*13,030	12,370	*10,150	8,040	*8,840	5,720	*7,150	4,780	8.36 m
3.0m	kg					*11,540	7,550	9,330	5,500	*7,340	4,410	8.67 m
1.5m	kg					*12,610	7,150	9,090	5,280	7,310	4,290	8.71 m
G.L.	kg			*15,460	10,410	12,440	6,940	8,940	5,150	7,530	4,390	8.47 m
-1.5m	kg	*11,100	*11,100	*16,530	10,460	12,390	6,890	8,920	5,130	8,260	4,790	7.94 m
-3.0m	kg	*18,730	*18,730	*14,550	10,650	*11,150	7,010			*8,880	5,720	7.03 m
-4.5m	kg			*10,840	*10,840					*8,260	8,180	5.58 m

SK380SRLC		Arm: 3.10m Bucket: without Counterweight: 9,000kg Shoe: 600mm												
A		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
														
B														
9.0m	kg					*5,380	*5,380					*4,790	*4,790	6.10 m
7.5m	kg					*7,420	*7,420	*4,530	*4,530			*4,240	*4,240	7.53 m
6.0m	kg					*7,960	*7,960	*7,600	5,960			*4,030	*4,030	8.45 m
4.5m	kg	*16,910	*16,910	*11,300	*11,300	*9,180	8,170	*8,110	5,770	*4,280	4,250	*3,990	*3,990	9.03 m
3.0m	kg			*14,640	11,590	*10,700	7,640	*8,860	5,500	*6,770	4,140	*4,090	3,910	9.31 m
1.5m	kg			*17,010	10,690	*12,030	7,180	9,070	5,250	6,910	4,020	*4,330	3,800	9.35 m
G.L.	kg			*17,670	10,320	12,390	6,870	8,860	5,070	*6,450	3,940	*4,770	3,860	9.13 m
-1.5m	kg	*11,420	*11,420	*17,140	10,250	12,250	6,750	8,770	4,990			*5,530	4,150	8.64 m
-3.0m	kg	*18,020	*18,020	*15,650	10,370	*11,810	6,790	8,840	5,050			*6,960	4,800	7.82 m
-4.5m	kg	*17,300	*17,300	*12,830	10,690	*9,480	7,040					*8,160	6,290	6.54 m

- Note:
- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
 - Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
 - Bucket pin attachment point defined as lift point.
 - The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk(*) are limited by hydraulic capacity rather than tipping load.
 - Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
 - Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by KOBELCO CONSTRUCTION MACHINERY CO., LTD. No part of this catalogue may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

5-15, Kitashinagawa 5-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135
<https://www.kobelcocm-global.com/>

Inquiries To:

Bulletin No. SK380SRLC-ANZ-101-2102

SK380SRLC

KOBELCO

Performance X Design

SK380SR_{LC}



■ Bucket capacity:

1.20 m³

■ Engine power:

200 kW / 2,100 min⁻¹

■ Operating weight:

36,800 kg

We Save You Fuel
Achieving a Low-Carbon Society



Performance Design

With the release of the SK380SRLC, KOBELCO has completely harmonised the values of PERFORMANCE and DESIGN.

The SK380SRLC delivers greater efficiency and productivity with increased power and speed, along with uncompromising operator comfort and machine operability.

In the pursuit of producing unique and unbeatable machines that provide comfort and productivity without equal, KOBELCO continues to rise to the challenge.

SK380SR_{LC}



PREMIER OPERATOR COMFORTS

Comfortable seat with air suspension

An air suspension seat is standard equipment in the spacious and climate controlled cabin, with optimal vent placement and a dust-free pressurised design ensuring superior operator comfort.

A switch activates a heated seat function for additional comfort in cooler climates.

Optimal air conditioning vent placement

Air conditioning vents are optimally placed around the cabin with air flow directed toward the operator's neck and back, providing more comfortable operation.

Ergonomic and low-effort pilot control levers

Pilot control levers are mounted on adjustable consoles, with an ergonomic design that allows movement without twisting, reducing operator fatigue.



Spacious Cab Interior

The cube shaped cabin design makes the most of straight lines, so the cab interior is more spacious, allowing for ample leg and shoulder room and accommodating operators of all sizes.

Super-Airtight Cab

The airtight cabin ensures a quiet, comfortable cabin interior, and keeps dust out of the cab.



Low Vibration

Coil springs absorb small vibrations, and high suspension mounts filled with silicone oil reduce heavy vibration. The long stroke achieved by this system provides excellent protection from vibration.



EXCELLENT LIFTING AND DIGGING PERFORMANCE IN NARROW SPACES

Drawbar Pulling Force (SAE)

Excellent drawbar force lets you conquer rough terrain and slopes.

314 kN

Lifting Capacity

12,390 kg

(Ground level over front @6.0m)



Heavy Lift

High hydraulic pressure (Heavy Lift) means greater lifting power, at close radius, allowing for smooth and steady operation while moving heavy objects.



Swing Priority

Our exclusive system automatically and instantly delivers full swing power during combined operations. There's no need to switch modes to make quick work of jobs like side-digging and back-filling.

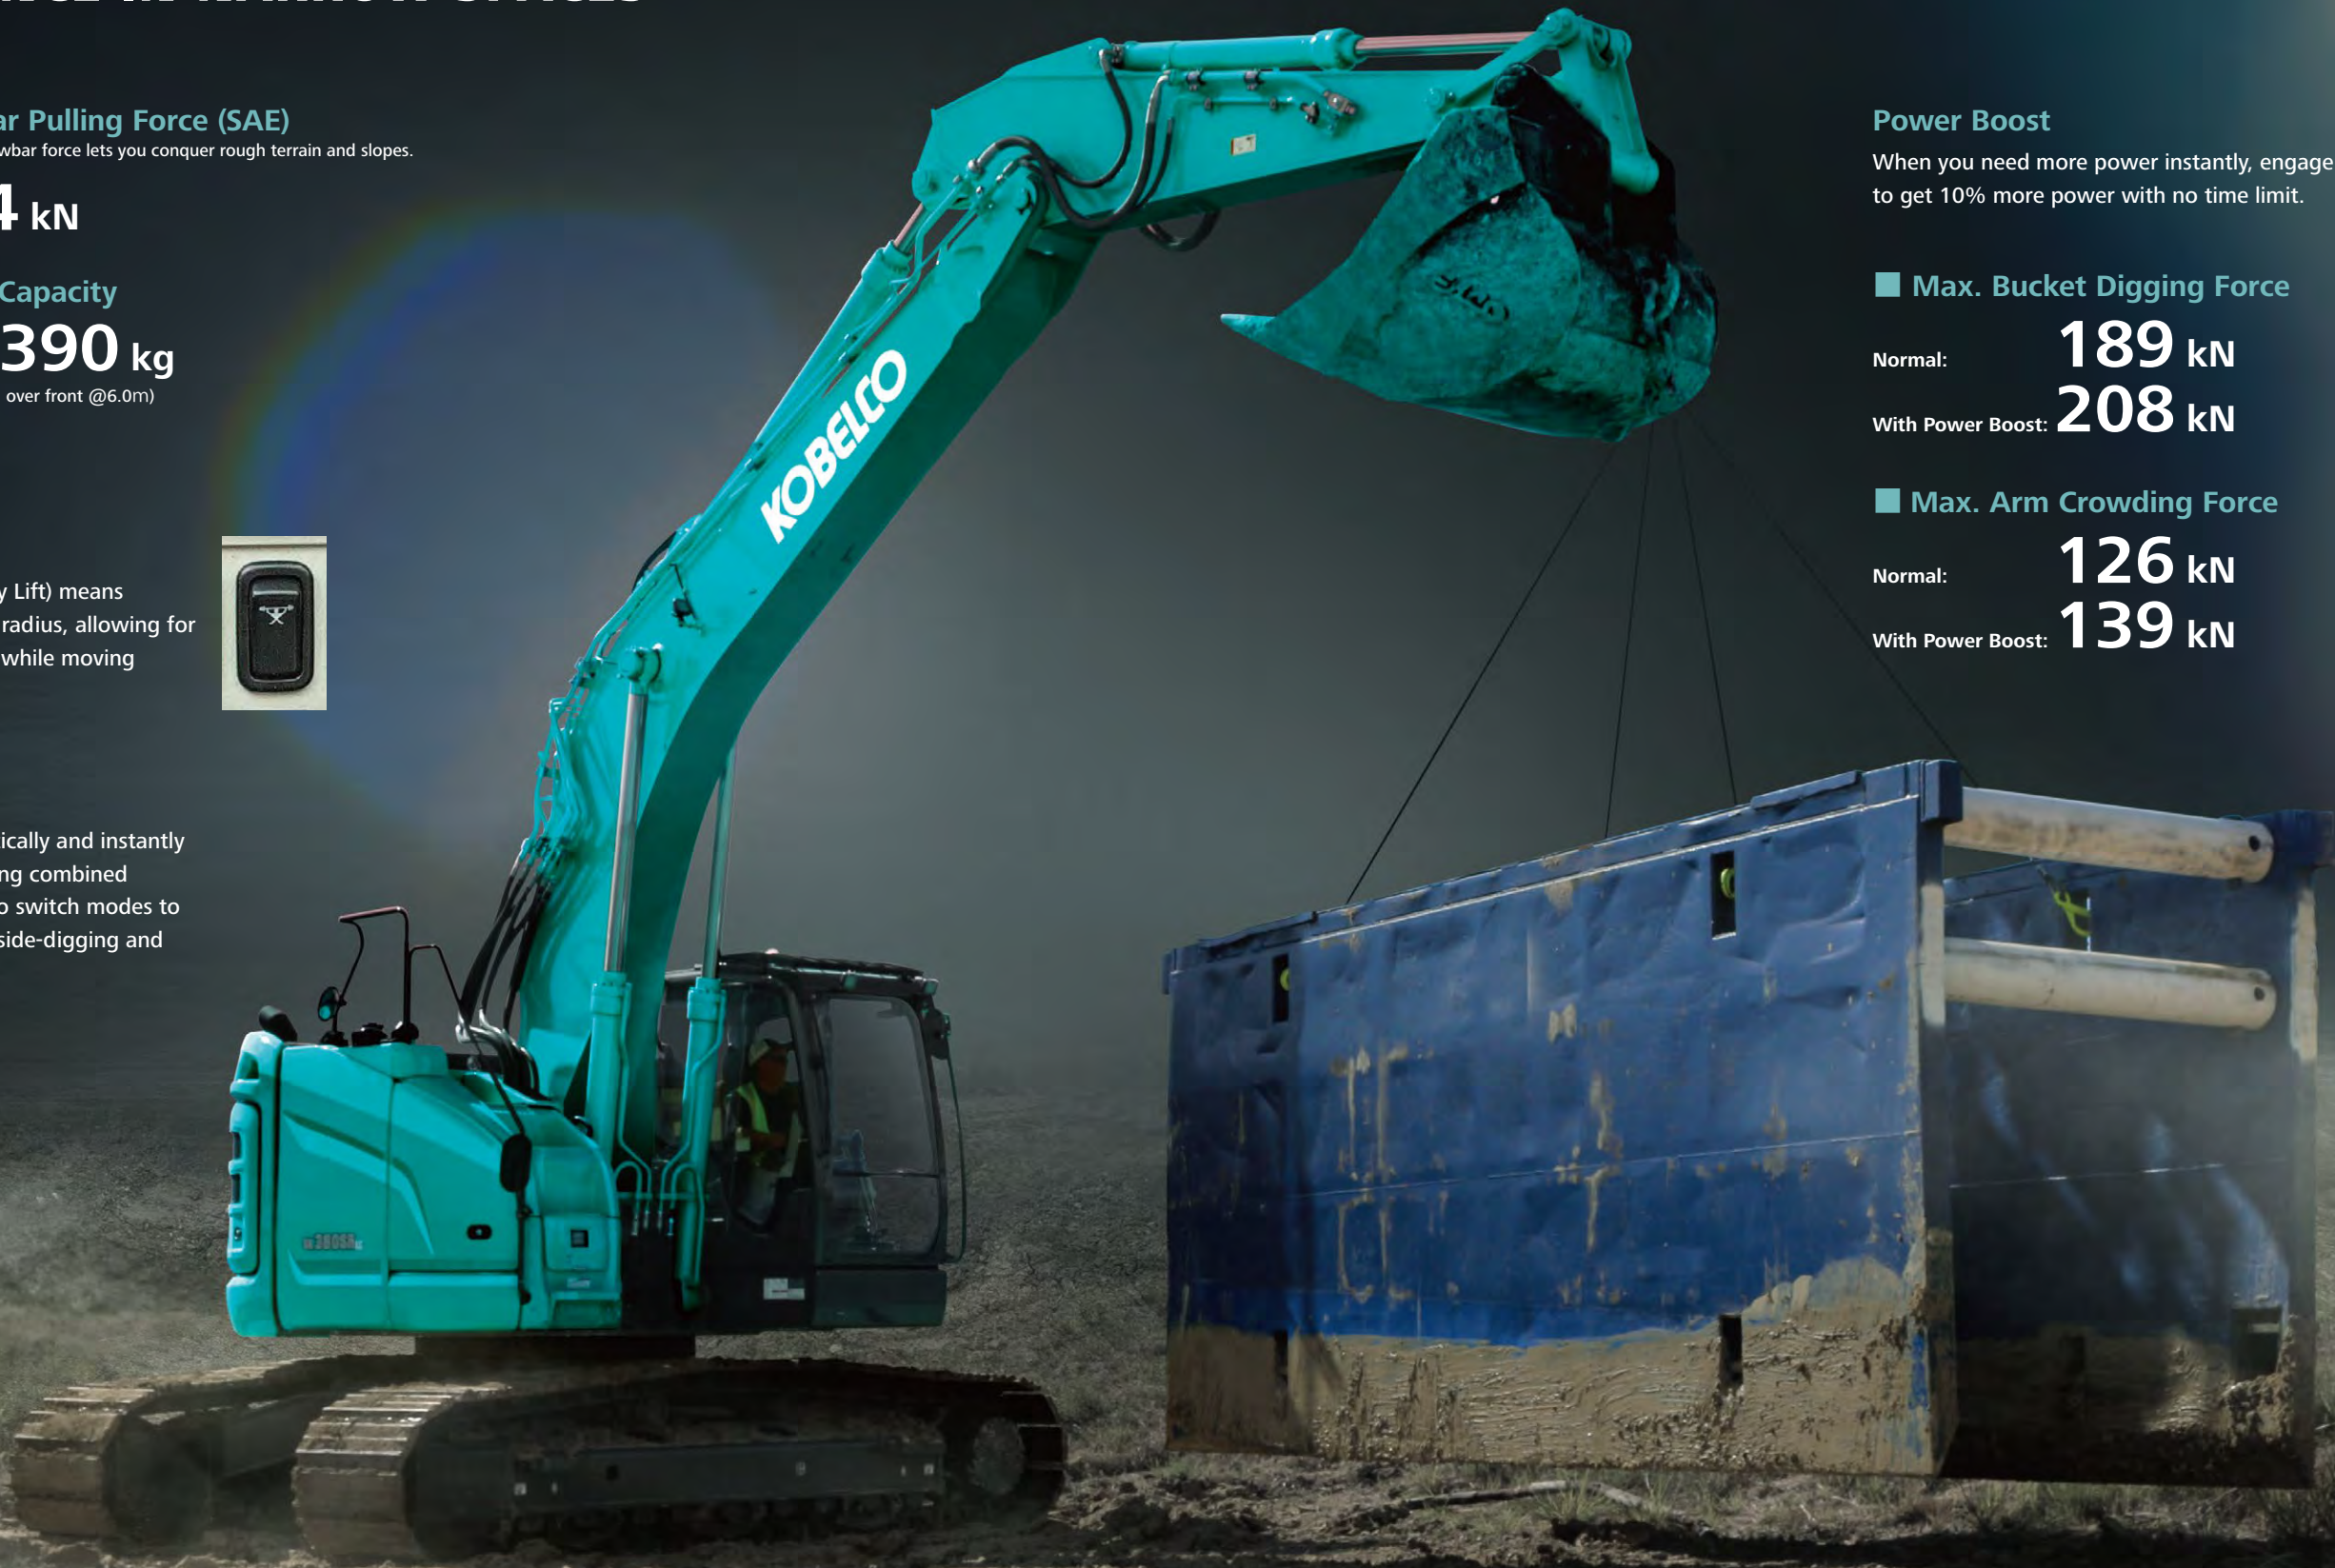

Power Boost

When you need more power instantly, engage Power Boost to get 10% more power with no time limit.

Max. Bucket Digging Force

Normal: 189 kN

With Power Boost: 208 kN

Max. Arm Crowding Force

Normal: 126 kN

With Power Boost: 139 kN


*The picture shows 850mm shoe. 850mm shoe is optional equipment.



EXCEPTIONAL PERFORMANCE JUST GOT EVEN BETTER

KOBELCO engines comply with Tier IV Final emissions regulations

Hino engines are renowned for fuel efficiency and environmental performance, and KOBELCO has tuned them specifically for construction machinery. The high-pressure common rail fuel injection system, the variable-geometry (VG) turbocharger, and the exhaust gas recirculation (EGR) system reduce particulate matter (PM) while the large EGR cooler greatly reduces the formation of Nitrogen Oxide (NOx) gases.

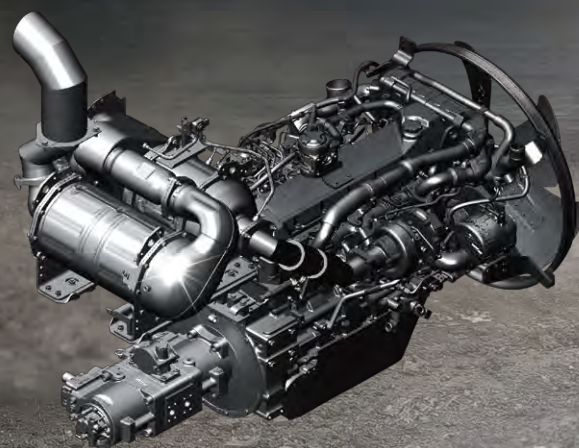

Model: HINO J08 EYD

Engine output

200 kW/2,100 min⁻¹
(ISO14396 : without fan)

Short radius design occupies only one lane of highway

In addition to excellent lifting and digging performance, the SK380SRLC has adopted the attachment mode for a variety of tasks such as breaking and operates effectively even in narrow spaces such as a single highway lane. Additionally, the cab permits operators to concentrate on work in a wide and comfortable space.




* The picture shows 850mm shoe. 850mm shoe is optional equipment.

EASY MAINTENANCE



MULTI-DISPLAY IN COLOUR


Brilliant colours and graphic displays are easy to recognise on the LCD multi-display in the console. The display shows fuel consumption, maintenance intervals, and more.

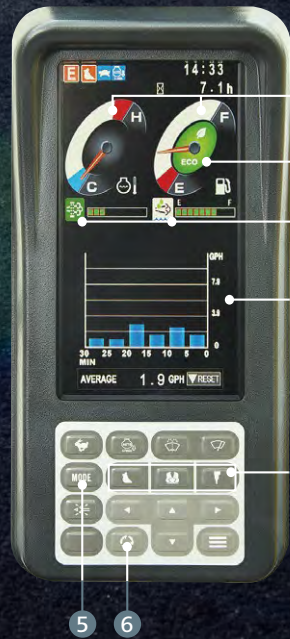

- 1 Analog-style gauges provide an intuitive reading of fuel level and engine temperature
- 2 Green indicates ECO mode selected or efficient operation in other modes
- 3 PM accumulation (left)/DEF level (right)
- 4 Fuel consumption/Rear-view camera
- 5 Digging mode switch
- 6 Monitor display switch

One-touch attachment mode switch

A simple flick flick of the switch converts the hydraulic circuit and flow amount to match attachments. Helpful icons let the operator confirm the proper configuration at a glance.

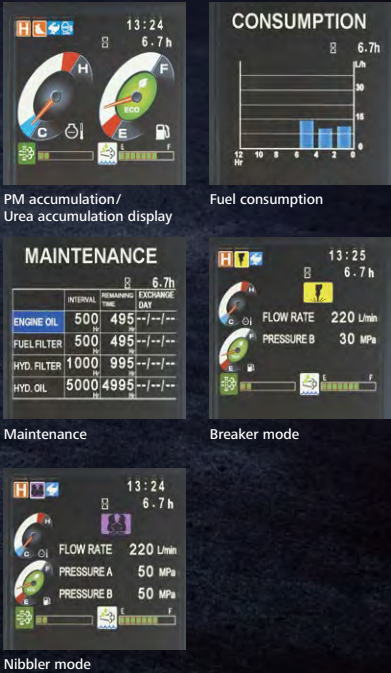

Ground level DEF tank



Ground level storage compartment access



Two-stage air filter



Engine maintenance
A special lower access step near the engine simplifies maintenance.



Remote fuel tank drain valve

SAFETY ON FULL DISPLAY

Standard Safety Camera System

Thanks to the cameras on the right, the operator inside the cab can confirm the safety of the worksite. The additional monitor makes it easy to confirm the situation. So, safety can be confirmed with the left rear cab mirror and the right camera.




Rear view Right view



* The picture shows 850mm shoe. 850mm shoe is optional equipment.

SAFETY AND CONVENIENCE IN EVERY CORNER

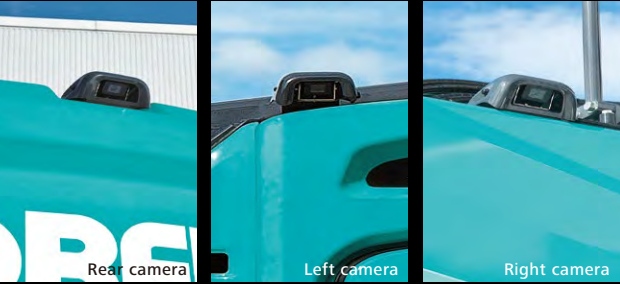

Standard built-in rear and right side cameras



Rear-view mirror




Swing flashers for a safer job site



Piping for Quick Hitch
A quick hitch hydraulic line which speeds up attachment changes is available.



Standard FOPS overhead cab guard
The standard FOPS guard can be tilted open for easy window cleaning. Meets standard FOPS, Top Guard Level II requirements. (ISO10262)



Rain visor and Cab 2 lights is optional



Standard LED lights
Bright LED lights ensure visibility even during night work.




Bluetooth® installed radio
Bluetooth® is installed to allow syncing with smartphones and other devices.
**Bluetooth® is a registered trademark of the Bluetooth SIG Inc.




Powerful automatic air conditioner
Also standard is an automatic air conditioner that maintains a comfortable interior environment all year around.



Handrail
The handrail on the step side allows easy access to the maintenance port on the upper arm.

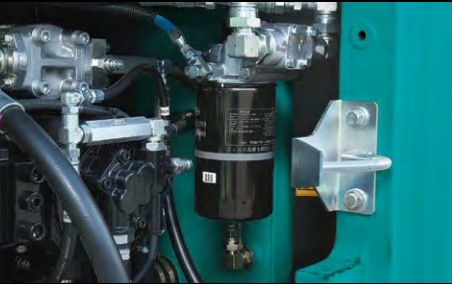

Engine oil filter

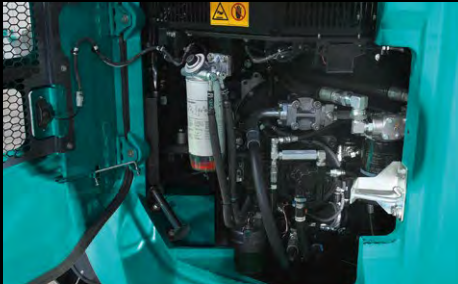

Ground level maintenance
Fuel filter with built-in water-separator.



Enlarged fuel filter
The enlarged fuel filter with built-in water separator maximises filtering performance.

Standard Equipment

- ENGINE
- Engine, HINO J08 EYD, diesel engine with turbocharger and intercooler, Tier IV Final certified
 - Auto Idle Stop (AIS)
 - Automatic engine deceleration
 - Batteries (2 X 12 V - 120 Ah)
 - Starting motor (24 V - 5 kW)
 - 60 amp alternator
 - Engine oil pan drain valve
 - Two-stage air filter

- CONTROL
- Working mode selector (H-mode, S-mode and ECO-mode)
 - Power Boost

- SWING SYSTEM & TRAVEL SYSTEM
- Swing rebound prevention system
 - Swing flasher
 - Two-speed travel with automatic shift down
 - Sealed & lubricated track links
 - 600mm steel track shoes
 - Grease-type track adjusters
 - Automatic swing brake

- MIRRORS, LIGHTS & CAMERAS
- Rear view mirrors, rear view camera, and right and left view cameras
 - Five LED front work lights (two for cab, two for boom, one for upper frame)

- CAB & CONTROL
- Two control levers, pilot-operated
 - Horn, electric
 - Pattern changer
 - Interior cab light
 - Coat hook
 - Large cup holder
 - Detachable two-piece floor mat
 - Air Ride Suspension Heated Seat
 - Retractable 3-inch seatbelt
 - Headrest
 - Handrails
 - Intermittent windshield wiper with double-spray washer
 - Skylight
 - Tilttable FOPS overhead cab guard (ISO 10262)
 - Tinted safety glass
 - Pull-type front window and removable lower front window
 - Easy-to-read multi-display monitor
 - Automatic climate control
 - Emergency escape hammer
 - Radio (AUX & Bluetooth®)
 - 12 V converter
 - Travel alarm
 - Lower swivel guard
 - Quick hitch piping
 - Geoscan
 - Automatic air conditioner

Optional Equipment

- 700, 800, 850mm steel track shoes
- Front-guard (bar type)
- Rain visor (may interfere with bucket action)
- Air suspension seat
- Rotation hydraulic circuit
- Nibbler/Breaker hand control

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.
"Bluetooth®" is a registered trademark of the Bluetooth SIG Inc.

GEO SCAN Total Support for Machines with Network Speed and Accuracy

GEOSCAN is a cellular based telematics system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

Direct Access to Operational Status

- Location Data
Accurate location data can be obtained even from sites where communications are difficult.
- Fuel Consumption Data
Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.
- Operating Hours
A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable. Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

Graph of Work Content
The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (NGB).

Maintenance Data and Warning Alerts

- Machine Maintenance Data
Provides maintenance status of separate machines operating at multiple sites. Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.
- Security System
- Engine Start Alarm
Sends a notification if the engine is started outside of pre-defined hours.
- Area Alarm
Sends a notification if the machine leaves a pre-defined area.



Specifications



Engine

Model	HINO J08 EYD
Type	Four-cycle, liquid-cooled, direct injection diesel, turbo charged, Tier IV Final certified
No. of cylinders	6
Bore and stroke	112 mm x 130 mm
Displacement	7.684 L
Rated power output	188 kW/2,100 min ⁻¹ (ISO 9249: with fan)
	200 kW/2,100 min ⁻¹ (ISO 14396: without fan)
Max. torque	989 N·m/1,600 min ⁻¹ (ISO 9249: with fan)
	1,017 N·m/1,600 min ⁻¹ (ISO 14396: without fan)



Hydraulic system

Pump	
Type	Two variable displacement axial piston pumps with a gear pump
Max. discharge flow	2 x 246 L/min
	1 x 21 L/min
	Extra gear pump 1 x 43 L/min
Relief valve setting	
Boom, arm and bucket	34.3 Mpa
Power Boost	37.8 Mpa
Travel circuit	34.3 Mpa
Swing circuit	29.0 Mpa
Control circuit	5.0 Mpa
Pilot control pump	Gear type
Main control valves	12-spool
Oil cooler	Air cooled type



Swing system

Swing motor	One fixed displacement piston pump
Parking brake	Wet multiple plate
Swing speed	8.4 min ⁻¹
Swing torque	120 kN (SAE)
Tail swing radius	1,900 mm
Min. front swing radius	3,450 mm



Attachments

Backhoe bucket and combination

Use			Backhoe bucket
			Normal digging
Bucket capacity	ISO heaped	m ³	1.20
	struck	m ³	0.84
Opening width	With side cutter	mm	1,490
	Without side cutter	mm	1,300
No. of teeth			5
Bucket weight		kg	1,060
Combination	3.10 m standard arm		○
	2.40 m short arm		○

○ Recommend



Travel system

Travel motors	Variable displacement piston, two-speed motors
Parking brakes	Wet multiple plate
Travel shoes	48 each side
Travel speed	4.6/2.8 km/h
Drawbar pulling force	314 kN (SAE)
Gradeability	70 % {35°}
Ground clearance	500 mm



Cab & control

Cab
All-weather, sound-suppressed steel cab mounted on the silicon-sealed suspension mounts and equipped with a heavy, insulated floor mat.
Control
Two hand levers and two foot pedals for travel
Two hand levers for excavating and swing
Electric rotary-type engine throttle



Boom, arm & bucket

Boom cylinders	145 mm x 1,361 mm
Arm cylinder	150 mm x 1,675 mm
Bucket cylinder	130 mm x 1,208 mm



Refilling capacities & lubrications

Fuel tank	350 L
Cooling system	35 L
Engine oil	28.5L
Travel reduction gear	2 x 7.5 L
Swing reduction gear	7.4 L
Hydraulic oil tank	245 L
	440 L
DEF tank	20.7L



Working ranges

Unit: m		
Boom	6.20 m	
Range	2.40 m	3.10 m
a- Max. digging reach	10.30	10.93
b- Max. digging reach at ground level	10.09	10.74
c- Max. digging depth	6.29	6.99
d- Max. digging height	10.78	11.17
e- Max. dumping clearance	7.75	8.15
f- Min. dumping clearance	3.87	3.11
g- Max. vertical wall digging depth	5.69	6.11
h- Min. swing radius	3.56	3.45
i- Horizontal digging stroke at ground level	3.99	5.59
j- Digging depth for 2.4 m (8') flat bottom	6.10	6.83
Bucket capacity ISO heaped m ³	1.20	


Unit: kN		
Arm length	2.40 m	3.10 m
Bucket digging force	189 / 208*	189 / 208*
Arm crowding force	158 / 174*	126 / 139*

*Power Boost engaged.




Dimensions

Unit: mm		
Arm length	2.40 m	3.10 m
A Overall length	10,100	9,980
B Overall height (to top of boom)	3,550	3,300
C Overall width	3,190**	
D Overall height (to top of handrail)	3,530	
D' Overall height (to top of cab)	3,350	
E Ground clearance of rear end*	1,160	
F Ground clearance*	500	

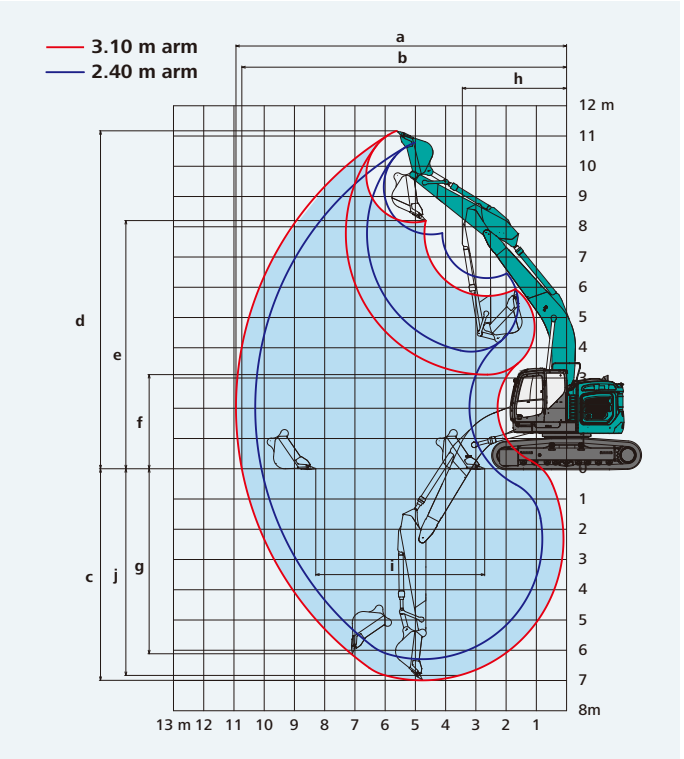

G Tail swing radius	1,900
G' Distance from center of swing to rear end	1,900
H Tumbler distance	4,050
I Overall length of crawler	4,960
J Track gauge	2,590
K Shoe width	600
L Overall width of upperstructure	3,180

*Without including height of shoe lug **600 mm shoe

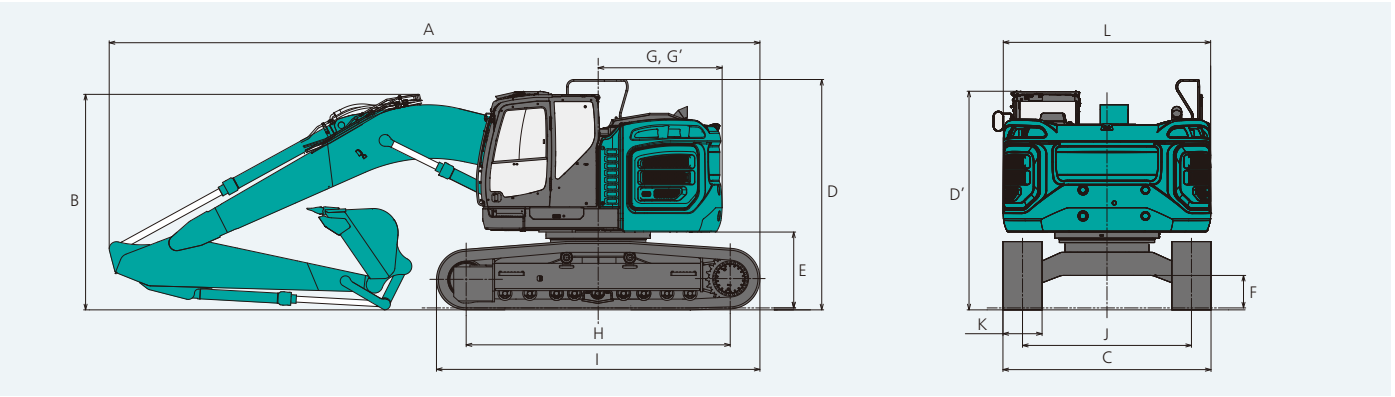

Operating weight & ground pressure standard boom

Boom: 6.20 m Arm: 2.40 m Bucket: 1.20 m³ ISO heaped bucket

Type of Grouser		Triple grouser				Double grouser
Shoes	mm	600	700	800	850	600
Ground pressure	kPa	68	60	53	50	69
Operating weight	kg	36,600	37,400	37,800	38,000	37,100

Boom: 6.20 m Arm: 3.10 m Bucket: 1.20 m³ ISO heaped bucket

Type of Grouser		Triple grouser				Double grouser
Shoes	mm	600	700	800	850	600
Ground pressure	kPa	69	60	53	51	70
Operating weight	kg	36,800	37,600	38,000	38,200	37,300